Owner: Engineering		SUBTL SR2-2xIT racks 10kW-Power	SR2N02010PAA1		
Author: Michael Gmerek	Vertiv Co.	Redundancy	-SUBTL		
Date: 4/1/2024		SmartRow 2 Submittal	Rev B		

Contents

Contents	1
SmartRow 2 Site Planning Guide	2
Interconnection Guide (ICG)	3
SmartRow 2 600mm IT Rack Outline	2
SmartRow 2 PMC Basic Outline	28
SmartRow 2 PMC Components	29
SmartRow 2 Row Cooling w Plenum Outline	3:
SmartRow 2 PMU Detail	32
SmartRow 2 Cable Trough 300mm Outline	34
SmartRow 2 Cable Trough 600mm Outline	3
SmartRow 2 Assembly Scope of Work	3

Smart Row 2 Site Planning Datasheet (208V, 3 phase, 4 wire + PE)

Configuration Number	Part Number	Max Row Capacity (kW)	IT Racks per Row	Capacity per Rack (kW)	Cooling Units per Row	pdu count	Main Input Breaker Size ⁶	Per Condenser Breaker Size	Per Condenser Dry Weight kg (lbs)	Row Dimensions (L x H x D) mm (in)7	Row Weight kg (lbs)	Min. Staging Area m2 (ft2)
1	SR2N02010NAA1	10	2	5	1	2	100A	N/A ⁵	60 (132.3)	2100 (82.7) x 2271 (107) x 1400 (55.2)	1463 (3227)	14.41 (155.2)
2	SR2N02010PAA1	10	2	5	1	4	100A	N/A ⁵	60 (132.3)	2100 (82.7) x 2271 (107) x 1400 (55.2)	1491 (3288)	14.99 (161.4)
3	SR2N02010FAA1	10	2	5	2	4	100A	N/A ⁵	60 (132.3)	2400 (94.5) x 2271 (107) x 1400 (55.2)	2112 (4656)	17.67 (190.2)
4	SR2N03010NAA1	10	3	3	1	3	100A	N/A ⁵	60 (132.3)	2700 (106.3) x 2271 (107) x 1400 (55.2)	1633 (3601)	15.76 (169.7)
5	SR2N03010PAA1	10	3	3	1	6	100A	N/A ⁵	60 (132.3)	2700 (106.3) x 2271 (107) x 1400 (55.2)	1675 (3694)	16.34 (175.9)
6	SR2N03010FAA1	10	3	3	2	6	100A	N/A ⁵	60 (132.3)	3000 (118.2) x 2271 (107) x 1400 (55.2)	2296 (5061)	19.02 (204.8)
7	SR2N03020NAA1	20	3	6	1	3	175A	15A	118 (260.2)	2700 (106.3) x 2271 (107) x 1400 (55.2)	1863 (4108)	18.46 (198.8)
8	SR2N03020PAA1	20	3	6	1	6	175A	15A	118 (260.2)	2700 (106.3) x 2271 (107) x 1400 (55.2)	1905 (4201)	20.51 (220.8)
9	SR2N03020FAA1	20	3	6	2	6	175A	15A	118 (260.2)	3000 (118.2) x 2271 (107) x 1400 (55.2)	2526 (5568)	24.42 (262.9)
10	SR2N04020NAA1	20	4	5	1	4	175A	15A	118 (260.2)	3300 (130) x 2271 (107) x 1400 (55.2)	2033 (4483)	19.81 (213.3)
11	SR2N04020PAA1	20	4	5	1	8	175A	15A	118 (260.2)	3300 (130) x 2271 (107) x 1400 (55.2)	2089 (4607)	21.86 (235.3)
12	SR2N04020FAA1	20	4	5	2	8	175A	15A	118 (260.2)	3600 (141.8) x 2271 (107) x 1400 (55.2)	2710 (5974)	25.77 (277.4)
13	SR2N05020NAA1	20	5	4	1	5	175A	15A	118 (260.2)	3900 (153.6) x 2271 (107) x 1400 (55.2)	2203 (4858)	21.16 (227.8)
14	SR2N05020PAA1	20	5	4	1	10	175A	15A	118 (260.2)	3900 (153.6) x 2271 (107) x 1400 (55.2)	2273 (5012)	23.21 (249.9)
15	SR2N05020FAA1	20	5	4	2	10	175A	15A	118 (260.2)	4200 (165.4) x 2271 (107) x 1400 (55.2)	2894 (6380)	27.12 (292)

FORM NO. DPN004659 REV - A

В

- 1. System Environmental Conditions: Indoors, 41 °F to 104 °F (5 °C to 40 °C), RH to 80% with Max dew point of 82.4 °F (28 °C)

 2. Floor surface must be level and continuous (expansion joints sealed, raised floor tile gaps sealed, no floor drains, etc).

 3. No building sprinkler head should be within 19.7 in (0.5 m).

 4. Install in accordance with national and local electrical codes

- 5. 10kW condenser power is sourced from the indoor unit
- 6. Cable Sizing: 100A = 3 AWG; 175A = 2/0 AWG
 7. Row Dimensions do not include necessary space needed for access including per ADA or local codes.

SHEET NO.	DRAWN BY:	O 2023 VERTIV GRUP CORPORATION CONCIDENTIAL AND PROPRIETARY ALL PRICES SESSIONED VERTIVA DIT NE YEAR THAT (LOCA OF TRADESIANES OF PREST) GROUP CORPORATION IT TO YOUR POSSESSION, YOU AGREE THAT TO VILLAGE THAT THAT THAT THAT THAT THAT THAT THA	DWG. NO.	
CO. NO.	DESIGNED BY:	IMMEDIATELY UPON REQUEST.	DATE (LATEST REV.)	VEDTIV
		TILE		VERTIV.
REF DWG.	APPROVED BY:	Smart Row 2 Site Planning Datasheet (208V, 3 phase, 4 wire + PE)	REVISION 505 N. CLEVELAND AVE WESTERVILLE, OHIO	

2

Α





Vertiv[™] SmartRow[™] 2: 2x IT Rack 10kW



Row IT Load Capacity: 10 kW Power Redundancy UPS: Yes Power Redundancy rPDU: Yes Cooling Redundancy: No Dimensions: Length: 6.89 ft Depth: 4.6 ft Height: 7.38 ft

SHEET NO THE COMMENT AND THE INVESTMENT OF THE PRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION. AND THIS DOCUMENT AND THE SHALL BE RETURNED TO VERTIV GROUP CORPORATION, SELL LERBY, OR OTHERWISE. DISPOSE OF SAME, DIRECTLY OR INDIRECTLY, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION. SHALL BE RETURNED TO VERTIV GROUP CORPORATION. 1 / 24 Nilesh Patil

DWG NO. SR2N02010PAA1 DATE (LATEST REV.)

505 N. CLEVELAND

CHANGE NO. Jakub Fencl

1- Title page / cover sheet

PAGE DESCRIPTION:

Vertiv™ SmartRow™ 2: 2x IT Rack 10kW

TITLE / DESCRIPTION:

		0	1	2	3	4	1	5	i	6		7		8		9	
	Ta	ble of conte	ents														
Α		Page			Page d	escription											
	=vR	ow/1		Title page / cover sheet	itle page / cover sheet												
	=vR	ow/2		Table of contents : =vRow,	/1 - =vRow+Thermal/13												
	=vR	ow/3		Structure identifier overview	N												
	=vR	ow/4		vRow Front View													\Box
	=vRe	ow/4.a		vRow Top View	ow Top View												
	=vR	ow/4.b		SR2 Components View													\Box
	=vRc	ow/5		One Line PMC and UPS													
В	=vR	ow/5.a		One Line Diagram Thermal													
	=vRe	ow/6		Part List Vertiv Supplied													
	=vRe	ow/7		Part List Customer Supplied	I												
	=vR	ow/8		Cable overview : =vRow+R	ack2-W202 - =vRow+PMC-PML	_LED Control-W11											
	=vR	ow/8.a		Cable overview : =vRow+P	MC-PMU_LED Control-W12 - =\	Row+Rack1-W207											\neg
	=vR	ow+PMC/9		PMC Power Distribution													
	=vR	ow+PMC/9.a		Power Distribution								,					
	=vR	ow+PMC/9.b		GXT5 10k-A													\neg
С	=vR	ow+PMC/9.c		GXT5 10k-B										\neg			
	=vR	ow+PMC/9.d		Rack Transfer Switch								,		,			
	=vR	ow+PMC/9.e		Emergency Fan Control													
	=vR	ow+PMC/9.f		RDU501													\neg
	=vR	ow+PMC/9.g		PMC Logic	C Logic												
	=vR	ow+PMC/9.h		POE Switch													
	=vR	ow+Rack1/10		IT Rack 1													\neg
	=vR	ow+Rack2/11		IT Rack 2													\neg
D	=vR	ow+Thermal/13		Thermal CRV1 & Condense	r1												
																	\neg
_																	
	E																
SHE	ET NO.		DRAWN BY:	T	© 2020 VERTIV GROUP CORPORATION CONFIDENTIA	L AND PROPRIETARY. ALL RIGH	ITS RESERVED.VERTIV AN	ND THE VERTIV LOGO ARE	TRADEMARKS OR REGIST	TERED TRADEMARKS OF VERTIV GROUP	P CORPORATION DV	NG NO. CDOM	VIU3U1UDV	<u></u> Τ			
	NGE NO.	/ 24	APPROVED BY:	ilesh Patil	© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY. ALL RIGHTS RESERVED.VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION THIS DOCUMENT (AND THE INFORMATION IT CONTRINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION BY ACCEPTING THIN TO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AN ALL INFORMATION CONTRINSE HEREIN IN STRETCEST CONFIDENCE AND WILL INFORMATION THE PROPERTY OF VERTIVE GROUP CORPORATION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION.				R OTHERWISE	ATE (LATEST REV.)		71		VED	TI\/		
			J.		TITLE / DESCRIPTION:			-				EVISION:	505 N. CLE	VELAND		VER	IIV
PAGI	PAGE DESCRIPTION: 2- Table of contents : =vRow/1 - =vRow+Thermal/			- =vRow+Thermal/13	Vertiv™ SmartRow™ 2: 2x IT Rack 10kW				В	AVE WEST	ERVILLE	• •					

	Structure identifie	T	Please note:
Α	Full designation	Structure description	This document is intended to provide guidance to a qualified electrical installer. The installer, owner, and end user
	Function designation		are responsible for adhering to all applicable building and
	=vRow		electrical codes, regulations, laws, and standards, and nothing in this document is intended to conflict therewith.
	+PMC	UPS, Network Switch, FC Controller, PMU	Vertiv is not responsible for any failure to conform therewith.
	+Rack1	vRack 1	In addition, nothing in this document is intended to conflict with the applicable product manuals, installation guides,
	+Rack2	vRack 2	or other product documentation, which documents take precedence over this design document.
В	+Thermal	Thermal Components and Condenser	You are responsible for adhering to guidance in the appropriate product documentation, but for your convenience, some such documents are accessible here:
С			Before installing, connecting to supply or start operation, please review the provided safety and regulatory statements. This system represents a functional unit of an IT infrastructure solution, and the installer, owner, and end user are responsible for its proper operation.
D			↑ WADNING
E		Failure to G Before installing, connectin Sa	c flash and electric shock hazard. comply can cause serious injury or death. g to supply or start operation, please review the provided afety and Regulatory Statements. may only be carried out by qualified personnel.
SHEET	T NO. 3 / 24	BY: © 2020 VERTIV GROUP CORPORATION CONFIDE THIS DOCUMENT (AND THE INFORMATION IT CO	INITIAL AND PROPRIETARY, ALL RIGHTS RESERVED.VERTIV AND THE VERTIV LOGO ARE TRADEMARIS OR REGISTERED TRADEMARIS OF VERTIV GROUP CORPORATION INTAINS), ARE THE PROPRETY OF VERTIV GROUP CORPORATION IN CACEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DOCUMENT AND INTAINS, ARE THE PROPRETY OF VERTIV GROUP CORPORATION, SET OF VEROUS AND WILL NOT ONLY RETAINSHIFT, LIES (EXCEPT SOLE IVEO OF THE RESERVET OF VERTIV GROUP CORPORATION), SET OF VEROUS AND WILL NOT WENTED AND WILL NOT ONLY RETAINSHIFT, LIES (EXCEPT SOLE IVEO OF THE RESERVET OF VERTIV GROUP CORPORATION), SET OF VERDING AND WILL NOT WENTED AND WILL
CHAN	GE NO. APPROV	ALL INFORMATION CONTAINED HEREIN IN STI DISPOSE OF SAME, DIRECTLY OR INDIRECTLY	RICTEST CONFIDENCE AND WILL NOT COPY, RETRANSINT, ISE (EXCEPT SOLEY FOR THE BENEFIT OF VERTIV GROUP CORPORATION), SELL, LEND, OR OTHERWISE WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP CORPORATION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIVY GROUP CORPORATION IMMEDIATELY UPON REQUEST. DATE (LATEST REV.)

Vertiv[™] SmartRow[™] 2: 2x IT Rack 10kW

PAGE DESCRIPTION:


3- Structure identifier overview


Jakub Fencl

TITLE / DESCRIPTION:

505 N. CLEVELAND AVE WESTERVILLE OH 43081

REVISION:

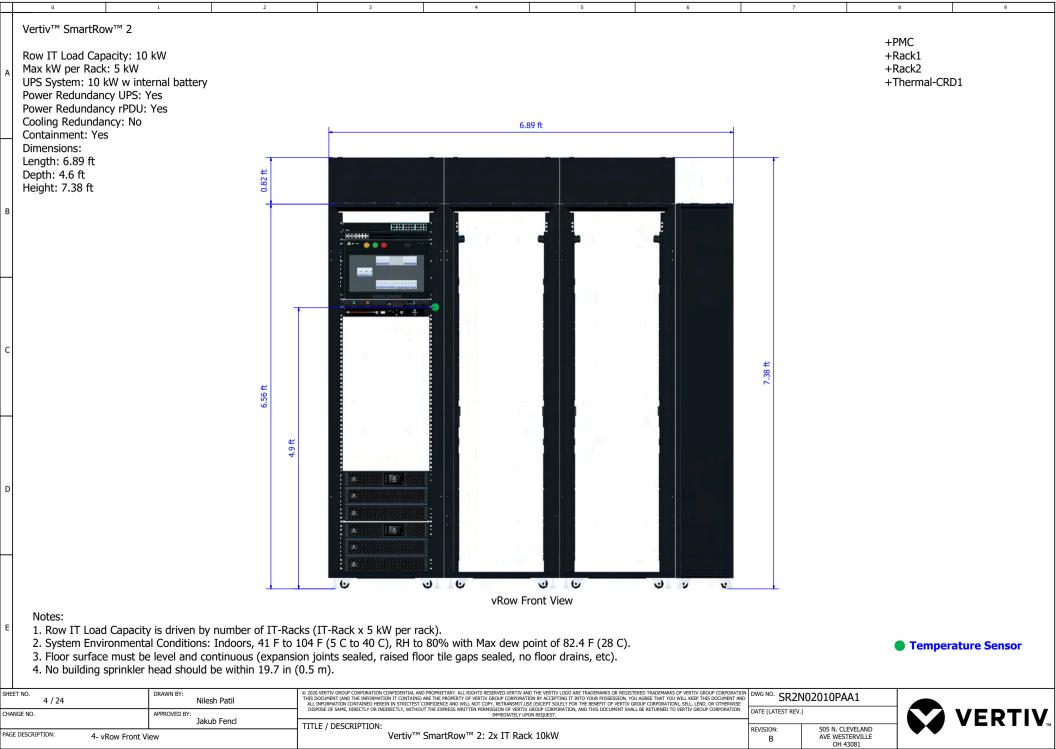

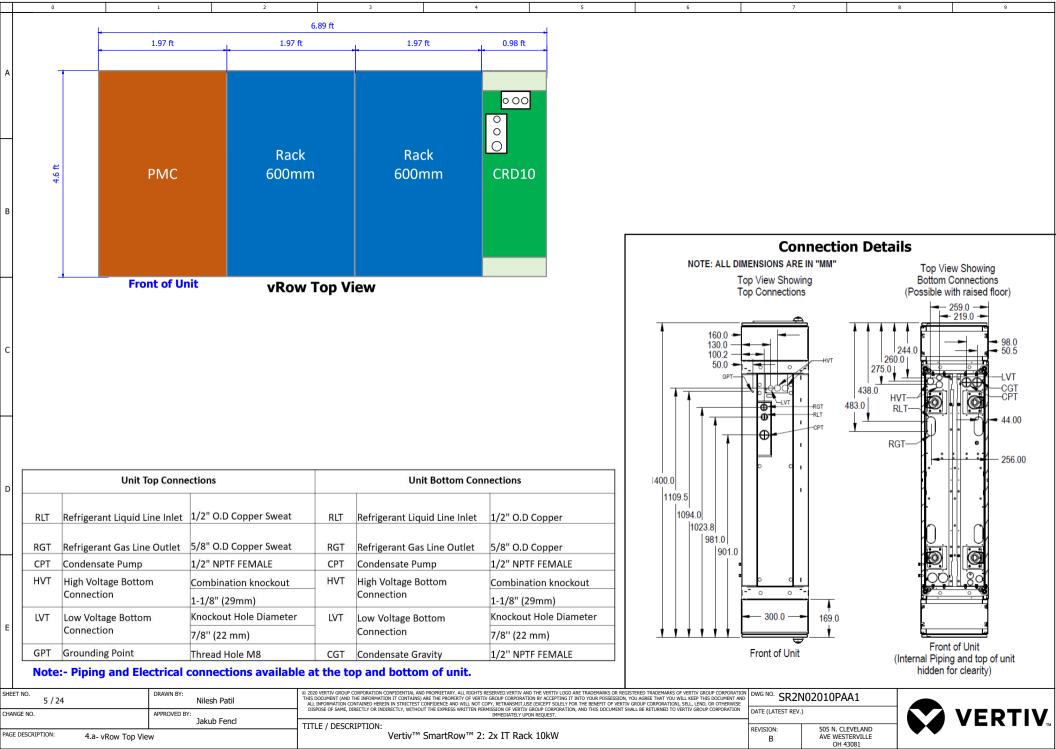


SR2 Main Components Centralized Infrastructure Management: Racks with Containment: FDS Front Door Switch 9-inch Touchscreen Panel: RDS Rear Door Switch Enables central management of all intelligent EIA310 19-inch rack system coupled with User-friendly display enables easy FDL Front Door Lock Handle equipment and IT devices within the system. tempered glass door enables fully enclosed access to system running status & • RDL Rear Door Lock Handle Reading & data are consolidated into single system design. Allows focused cooling in IT condition. • DC PS DC Power Supply platform. environment **Precision Cooling:** Row-based solution designed to provide maximum cooling in a compact footprint. Cooling modulation enables cooling on demand and quickly adapts to load fluctuation. Electronic Lock: Enables rack level security and access log is recorded intelligently. Supports local & remote door authorization. Power Management & Distribution: Pre-assembled & pre-integrated switchboard with surge protection. **Power Protection:** On-line double conversion UPS with unity power factor ensures clean power feeding to critical IT equipment. **Environmental Sensor: Power Management & Protection Emergency Ventilation:** Report critical environmental Activates automatically in the Thermal Management information and alarm notification. event of overheating or cooling Ensure IT equipment is kept in desired Management & Monitoring unit failure. condition. SHEET NO 6 / 24 Nilesh Patil DATE (LATEST REV.) CHANGE NO. Jakub Fencl TITLE / DESCRIPTION: PAGE DESCRIPTION: Vertiv[™] SmartRow[™] 2: 2x IT Rack 10kW 4.b- SR2 Components View


Explanation of terms: • FU Emergency Fan Control Unit

OWG NO. SR2N02010PAA1

505 N. CLEVELAND AVE WESTERVILLE



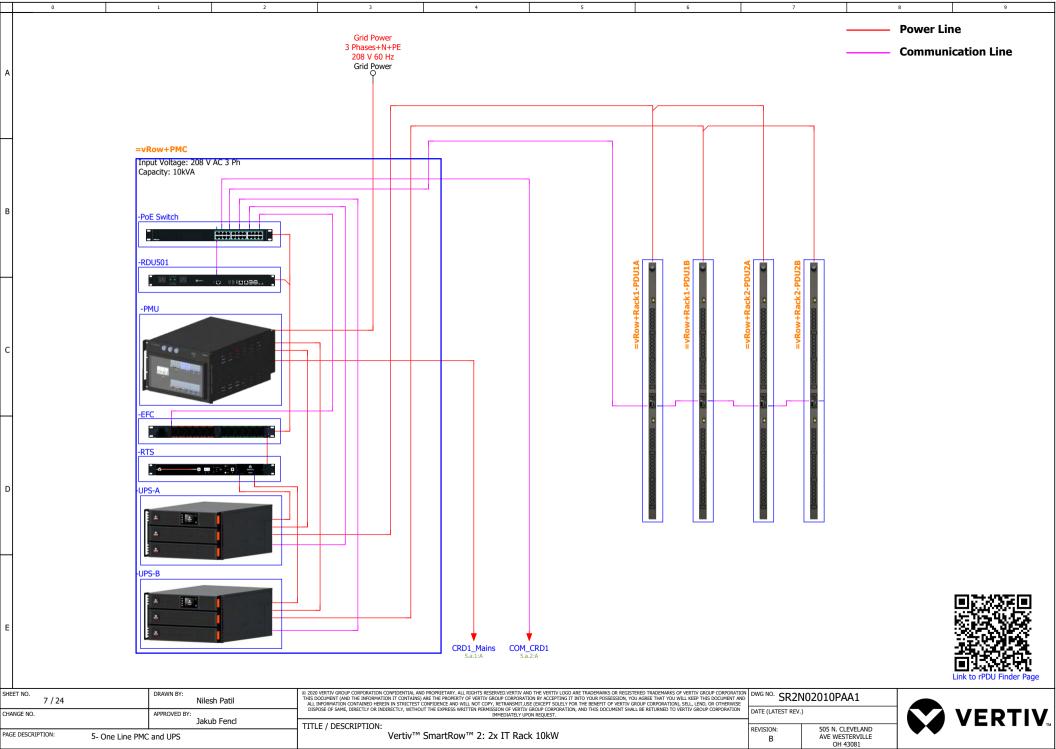

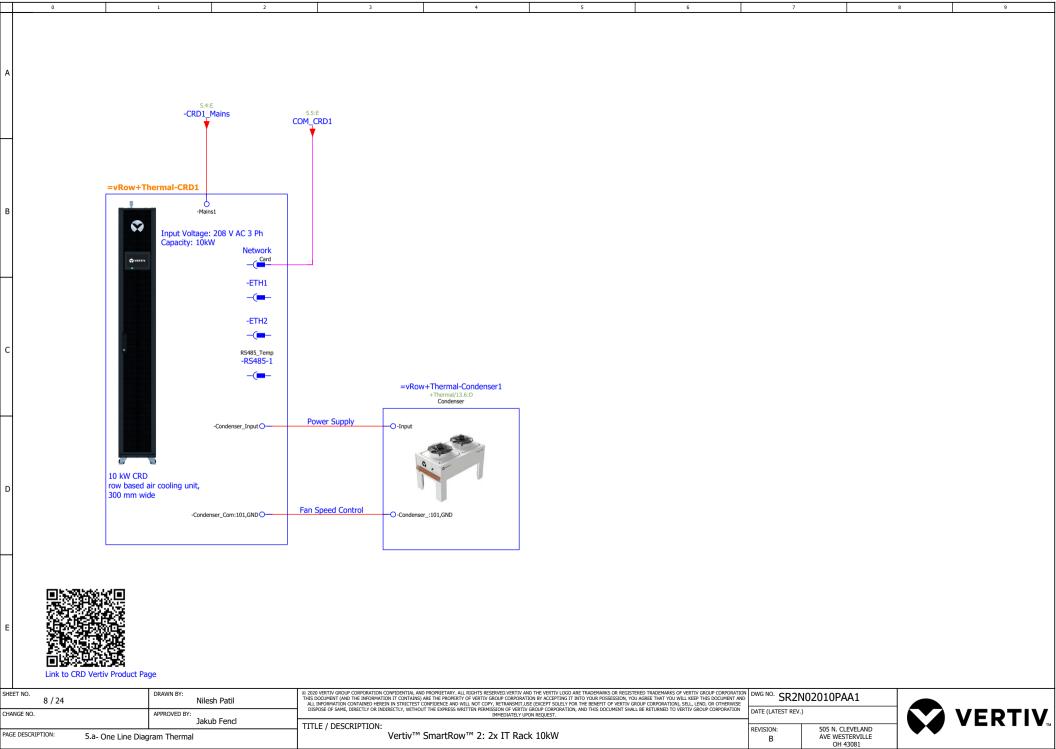

\mp	0	1 2		3 4	5 6	7	8	9
	VERTIV Suppli	ied Cable & Part	s list					
Δ	Device Designation Schematic / position	Device Function		Designation			SKU Number	
	+PMC-EFC +PMC/9.e.0:A	Emergency Fan Cor	ntrol PDU	rPDU, Switched Unit Level Monitorin	g EC, 30A, 208V, 4.9kW, Horizontal		VP53100	
	+PMC-PMU +PMC/9.0:A	10kW PMC			IAM (SKU TBD) - 1P = GXT5 - 20kVA ID x1, LED, FC, 4G Modem), qty: 1, RDU 501 (8C	OM card x1)	MSR2-NP2D	S2G22
	+PMC-POE Switch +PMC/9.h.1:B	POE Switch		POE Switch for Smart Aisle or Smart	Row NAM Solutions		POESwitch2	4Port
	+PMC-RDU501 +PMC/9.f.0:A	RDU501 Controller		Liebert RDU501 Intelligent Infrastru	cture Management Solution		RDU501	
В	+PMC-RTS +PMC/9.d.1:B	Rack Transfer Switc	ch		ogradable, 30A, 208V, 4.9kW, Horizontal cords with L6-30P, Black Powder Coat.		VA1N3100	
	+PMC-UPS-A +PMC/9.b.2:A	GXT5 10 kW UPS-A	\	UPS GXT5 10 kW 208 V 60 Hz 2 Pha 6U, optinal 1x PD2 POD	ises		GXT5-10KM	/RT6UXLN
	+PMC-UPS-A-POD1 +PMC/9.b.5:A	POD PD2-103		Power Output Distribution 4x 5-15/20R T-Slot and 4x L6-30R			PD2-103	
	+PMC-UPS-B +PMC/9.c.2:A	GXT5 10 kW UPS-B	3	UPS GXT5 10 kW 208 V 60 Hz 2 Pha 6U, optinal 1x PD2 POD	ases		GXT5-10KM	/RT6UXLN
	+PMC-UPS-B-POD1 +PMC/9.c.5:A	POD PD2-103		Power Output Distribution 4x 5-15/20R T-Slot and 4x L6-30R			PD2-103	
С	+Rack1-PDU1A +Rack1/10.2:A	PDU for Rack 1		rPDU, Monitored Unit Level EC, 30A (36) IEC C13, (6) IEC C19, 15ft pow	, 208V, 4.9kW, Vertical ver cord with L6-30P, Black Powder Coat.		VP4N3025	
	+Rack1-PDU1B +Rack1/10.2:B	PDU for Rack1		rPDU, Monitored Unit Level EC, 30A (36) IEC C13, (6) IEC C19, 15ft pow	, 208V, 4.9kW, Vertical ver cord with L6-30P, Black Powder Coat.		VP4N3025	
	+Rack2-PDU2A +Rack2/11.2:A	PDU for Rack 2		rPDU, Monitored Unit Level EC, 30A (36) IEC C13, (6) IEC C19, 15ft pow	, 208V, 4.9kW, Vertical ver cord with L6-30P, Black Powder Coat.		VP4N3025	
	+Rack2-PDU2B +Rack2/11.2:B	PDU for Rack2		rPDU, Monitored Unit Level EC, 30A (36) IEC C13, (6) IEC C19, 15ft pow	, 208V, 4.9kW, Vertical ver cord with L6-30P, Black Powder Coat.		VP4N3025	
D	+Thermal-CRD-1 +Thermal/13.0:A	Thermal Indoor Uni	it1	CRD101 10kW CRV row based Air co 300 mm wide 208 V 3Ph+PE	poling unit		CRD101-0D0	00A
	+Thermal-Condenser1 +Thermal/13.6:D	Thermal Outdoor U	Jnit1	Air Cooled Condenser CCD10 for NA 208 V 3ph	M CRD101		CCD100S-00	A
Е								
SHEET	9 / 24	DRAWN BY: Nilesh Patil	THIS DOCUMENT (AND TH	IE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATIONED HEREIN IN STRICTEST CONFIDENCE AND WILL NOT COPY, RETRANSMIT, I ECTLY OR INDIRECTLY, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV	ND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP TION BY ACCEPTING IT INTO YOUR POSSESSION, YOU AGREE THAT YOU WILL KEEP THIS DO SEE (EXCEPT SOLELY FOR THE BENEFIT OF VERTIV GROUP CORPORATION), SEL, LEND, OR Y GROUP CORPORATION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP	CLIMENT AND I SHOULD SRAIN	N02010PAA1	•
CHANG		APPROVED BY: Jakub Fencl	TITLE / DESCRI	PTION:	PON REQUEST.	REVISION:	505 N. CLEVELAND	VERTIV _™
PAGE D	ESCRIPTION: 6- Part List Vertin	v Supplied		Vertiv™ SmartRow™ 2: 2x IT Rac	CK 1UKW	В	AVE WESTERVILLE OH 43081	• •

	0	1 2	3 4	5 6	7 8	9
	Customer Sup	oplied Cable & Par	ts list			
Δ	Device Designation Schematic / position	Designation		Description		
	+Thermal-WA1 +Thermal/13.4:D	Power cable between 2 Wire + PE, 16AWG	CRD to CCD	Power Cable Ci	RD to CCD	
	+Thermal-WB1 +Thermal/13.4:E	Fan speed control com CRD to CCD	nmunication cable	Fan speed cont	rol communication cable	
В						
D						
Е						
Cher	ET NO.	DRAWN BY:	© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY, ALL RIGHTS RESERVED VERTIV AND THE VE THIS DOCUMENT (AND THE INFORMATION IT CONTAINS) ARE THE PROPRIETY OF VERTIV GROUP CORPORATION BY A THIS ILLEGATIVE OF THE INFORMATION IT CONTAINS) ARE THE PROPRIETY OF VERTIV GROUP CORPORATION BY A	RTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP COMPONDATION	NI DMG NO GDOLOGOGO	
	10 / 24	Nilesh Patil	DISPOSE OF SAME, DIRECTLY OR INDIRECTLY, WITHOUT THE EXPRESS WRITTEN PERMISSION OF VERTIV GROUP C	DRPORATION, AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION	DATE (LATEST REV.)	•
CHAN	NGE NO.	APPROVED BY: Jakub Fencl	IMMEDIATELY UPON REQU TITLE / DESCRIPTION:	ST.		VERTIV _™
PAGE	DESCRIPTION: 7- Part List Cust	omer Supplied	Vertiv™ SmartRow™ 2: 2x IT Rack 10l	kW	REVISION: 505 N. CLEVELAND AVE WESTERVILLE OH 43081	▼

Cable overview Cross-section Cable type **Function text Device tag** Conductors Length (m) (AWG) RACK2 to CRD2 power cascade cable +Rack2-W202 2 22 0.85 Smart door lock cascade +PMC-PMU-W104 1.7 Communication cable PMU to 4DI SPD communication network cable 1 +PMC-PMU-W105 1.8 PMU to RDU501 COM3 meter communication network cable 1 PMU to RDU501 D02 Control Red Light Cable +PMC-PMU_LED_Control-W102 1.8 1 +PMC-PMU LED Control-W103 PMU to RDU501 DO1 Strobe siren control cable 1 PMC to RDU501 COM1 intelligent door lock front door com. cable +PMC-W101 1 0.9 4DI to RDU501 Sensor2 SPD Communication Network Cable +PMC-W106 0.3 1 PMC to RDU501_ COM1 intelligent door lock rear door com. cable +PMC-W107 0.9 1 RDU501 COM2 to HMI communication cable +PMC-W108 0.8 1 PMC to RDU501 to PMC cabinet THD communication cable +PMC-W109 1 0.7 FC to Switch communication cable +PMC-W114 0.8 1 3.5 PDU to Switch communication cable +Rack1-W115 1 3 PDU1A to PDU1B communication cable +Rack1-W116 1 3 PDU1B to PDU2A communication cable +Rack2-W116 1 +Thermal-W110 1 0.85 CRD1 to Switch communication cable Smoke1 to CRV-Door microswitch cable +Thermal-W401 1 1 Emergency fan to FC PMC Emergency fan to FC controller cable +PMC-W209 3 18 1.2 3 18 4.5 Rack1 Emergency fan to FC controller cable +Rack1-W208 Rack2 Emergency fan to FC controller cable +Rack2-W208 3 18 5.5 Front door light cascade PMC to Rack1 front door LED light power cable +PMC-PMU LED Control-W210 4 20 1 Cascaded cable for the end RACK front door light +Rack1-W211 4 20 0.75 Front door microswitch cascade PMC to RACK1 front door microswitch cascade cable +PMC-PMU LED Control-W212 2 20 0.75 Cascade cable for the end RACK front door microswitch +Rack2-W213 2 20 0.75 22 Interconnection CRV/Condenser Fan speed control CCD1 +Thermal-WB1 2 Power cable PMU to PMC rear door LED light power cable +PMC-PMU_LED Control-W07 2 20 1.2 PMU to PMC front door LED light power cable +PMC-PMU_LED Control-W09 4 20 1.75 PMU to PMC front door microswitch power cable +PMC-PMU_LED Control-W11 20 1.25 Please note: Always when "conductor" = 1, or "Cross-section" is empty, it represents a network/communication cable. © 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY, ALL RIGHTS RESERVED.VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION THIS DOCUMENT AND THE INFORMATION IT CONTAINS, ARE THE PROPRETY OF VERTIV GROUP CORPORATION, AND ALL INFORMATION IT CONTAINS ARE THE PROPRETY OF VERTIV GROUP CORPORATION, AND ALL INFORMATION IT SHELL INFORMATION IT IN THIS DOCUMENT AND ALL INFORMATION IN STRICTES CONTINUENCE AND ALL INFORMATION CONTAINED HERE IN STRICTES CONTINUENCE AND ALL INFORMATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION INFORMATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION INFORMATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION INFORMATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIVE GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIVE GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIVE GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIVE GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIVE GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIVE GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIVE GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIVE GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIVE GROUP CORPORATION AND THE VERTIVE CORPORATION SHEET NO. DRAWN BY: 11 / 24 Nilesh Patil CHANGE NO. APPROVED BY Jakub Fencl TITLE / DESCRIPTION: REVISION: 505 N. CLEVELAND PAGE DESCRIPTION: Vertiv™ SmartRow™ 2: 2x IT Rack 10kW 8- Cable overview: =vRow+Rack2-W202 -AVE WESTERVILLE

=vRow+PMC-PMU_LED_Control-W11

OH 43081

Cable overview Cross-section Cable type **Function text Device tag** Conductors Length (m) (AWG) +PMC-PMU LED Control-W12 2 20 1.25 Power cable PMU to PMC rear door microswitch power cable +PMC-W01 6 2.4 PMU to UPS-A input cable +PMC-W02 6 2.4 PMU to UPS-B input cable 3 UPS-A to PMU output cable +PMC-W03 20 0.8 +PMC-W05 12 1.5 PMU to CRD1 output cable PMU to PMC intelligent door lock power cable +PMC-W06 2 22 1.2 PMU to HMI power cable +PMC-W08 2 22 2.2 CRD to condensor power cable +Thermal-WA1 3 16 Rear door light cascade PMC to Rack1 rear door LED light power cable +PMC-PMU_LED Control-W216 2 20 1 2 20 0.75 Cascading cable for rear door light of the end RACK +Rack1-W217 +PMC-PMU_LED Control-W214 2 Rear door microswitch cascade PMC to RACK1 rear door microswitch cascade cable 20 0.75 +Rack2-W215 2 20 Cascade cable for rear door microswitch of end RACK 0.75 +PMC-W201 2 22 0.85 Smart door lock cascade PMC to RACK1 power cascade cables 2 22 0.85 RACK1 to RACK2 power cascade cable +Rack1-W201 RACK1 to RACK2 communication cascade cables +Rack1-W205 1 0.85 0.85 RACK2 to CRD1 communication cascade cables +Rack2-W206 1 2 THD cascading PMC to RACK1 Cascade Cable +PMC-W207 1 2 +Rack1-W207 1 RACK1 to RACK2 Cascade Cable Please note: Always when "conductor" = 1, or "Cross-section" is empty, it represents a network/communication cable.

© 2020 VERTIV GROUP CORPORATION CONFIDENTIAL AND PROPRIETARY, ALL RIGHTS RESERVED VERTIV AND THE VERTIV LOGO ARE TRADEMARKS OR REGISTERED TRADEMARKS OF VERTIV GROUP CORPORATION THIS DOCUMENT AND THE INFORMATION IT CONTAINS) ARE THE PROPERTY OF VERTIV GROUP CORPORATION ALL INFORMATION IT CONTAINS ARE THE PROPERTY OF VERTIV GROUP CORPORATION, AND ALL INFORMATION ALL INFORMATION CHARACTERS IN INSTRICTES TO CONTINUE AND THE MORE THAT AND ALL INFORMATION CONTAINED HEREIN IN STRICTES TO CONTINUE AND ALL OF COPY, RETRINSENTLY, SE (DEVELOPE TO SELVE FOR THE BENEFIT OF VERTIV GROUP CORPORATION, SEL, LEIDN, OR OTHERWISE DESCRIPTION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION IMPRISED TO VERTIV GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED TO VERTIV GROUP CORPORATION AND THIS DOCUMENT SHALL BE RETURNED. DRAWN BY: Nilesh Patil

APPROVED BY Jakub Fencl TITLE / DESCRIPTION: Vertiv[™] SmartRow[™] 2: 2x IT Rack 10kW

505 N. CLEVELAND


AVE WESTERVILLE


REVISION:





SHEET NO.


12 / 24

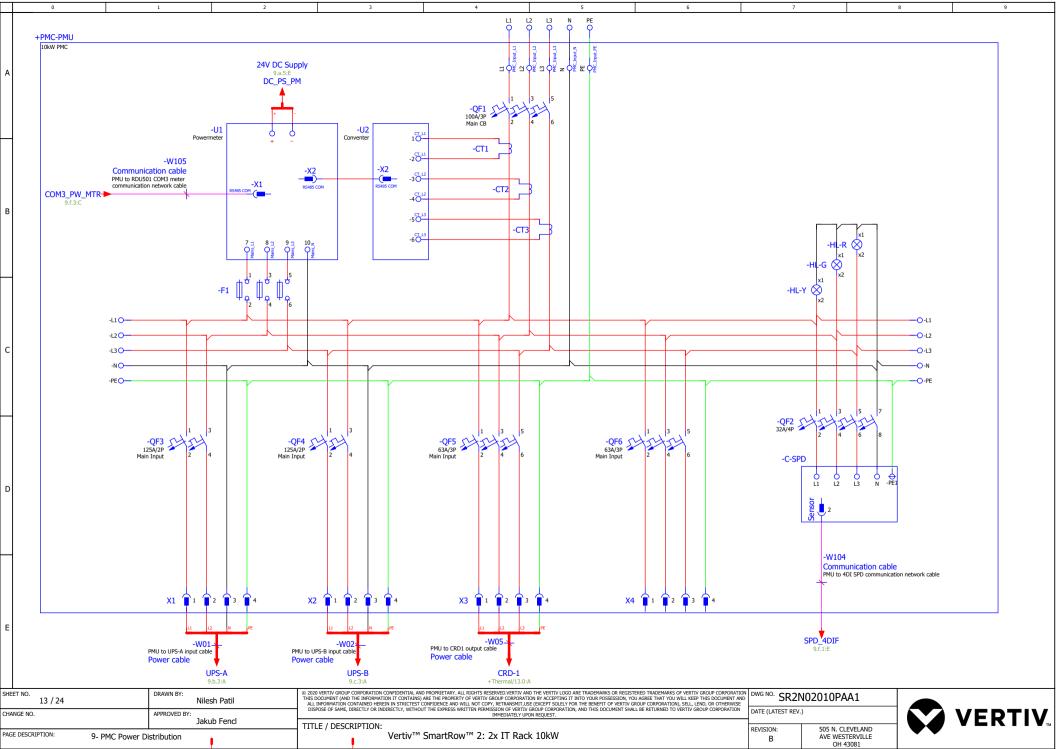


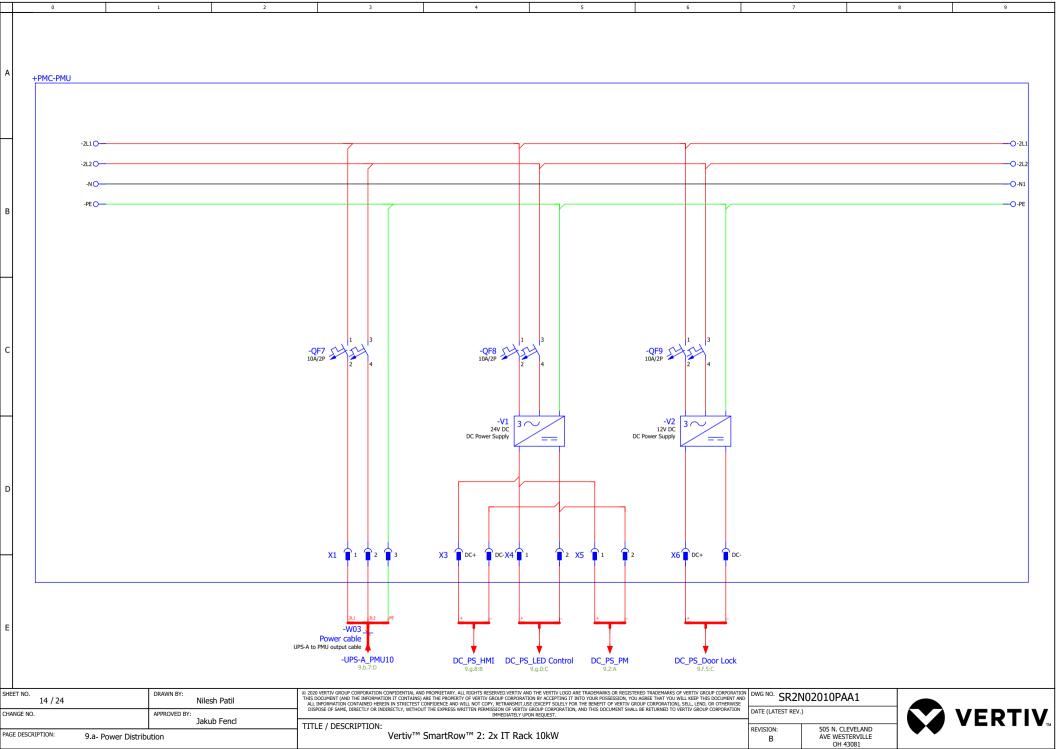


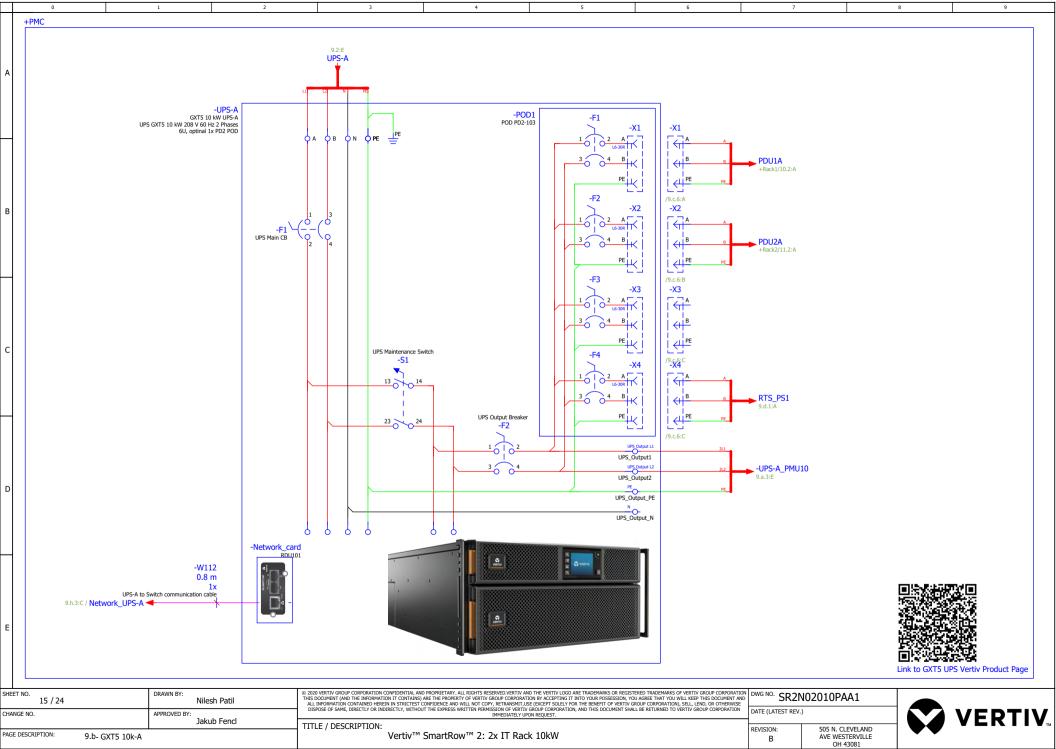


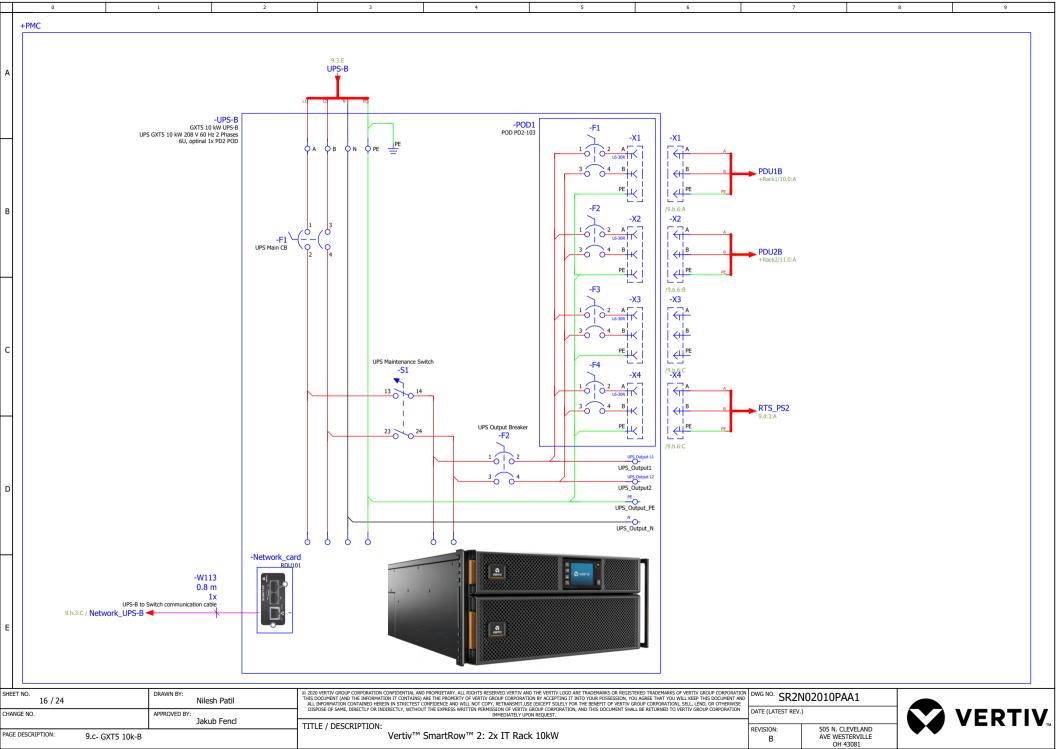


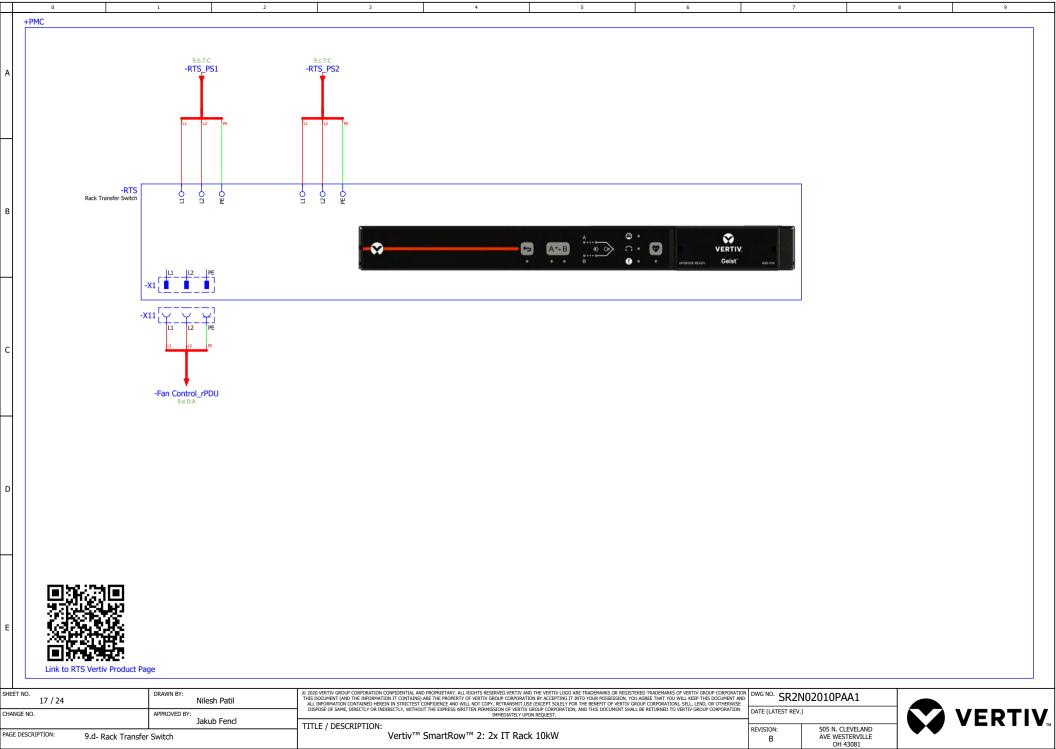


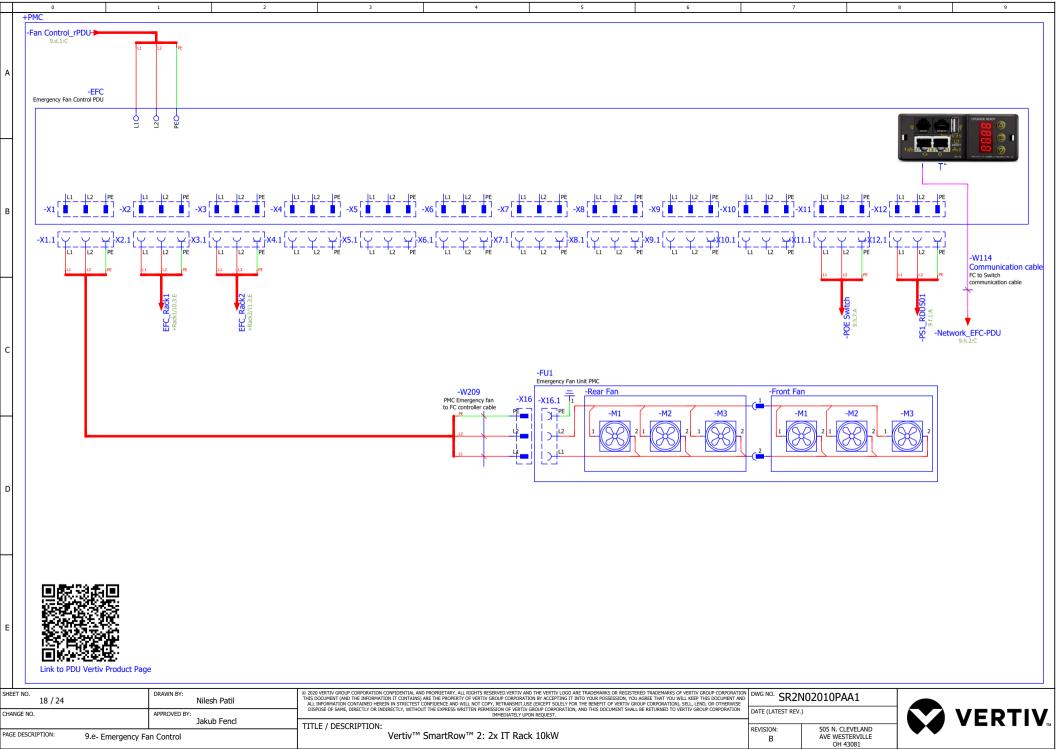


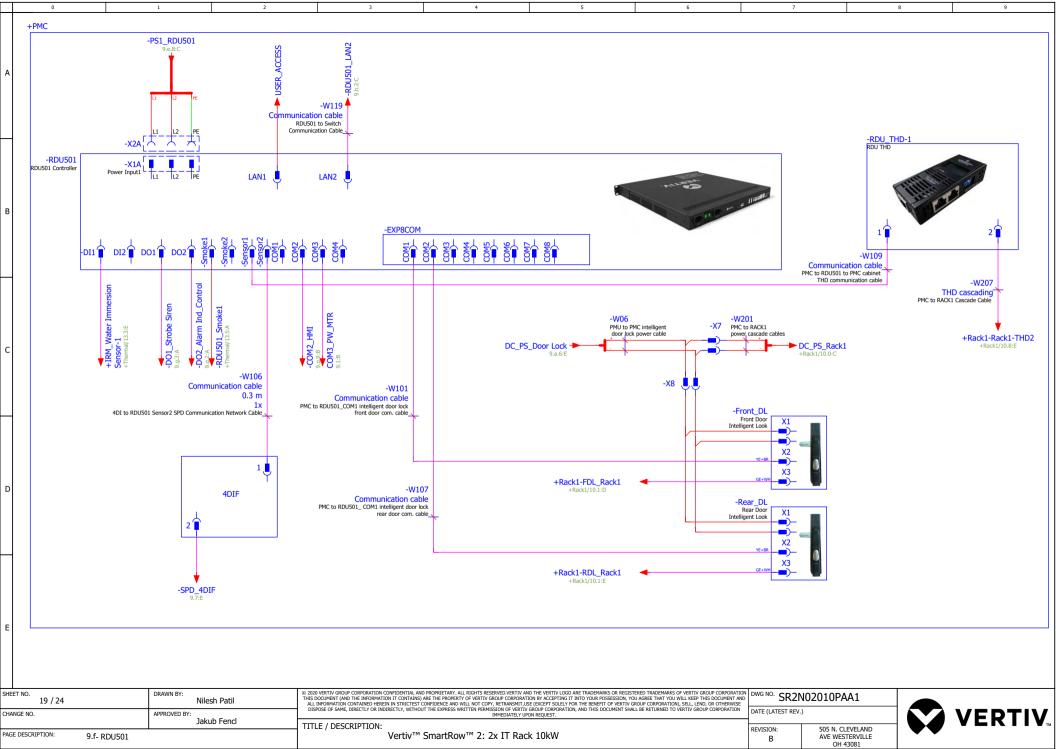


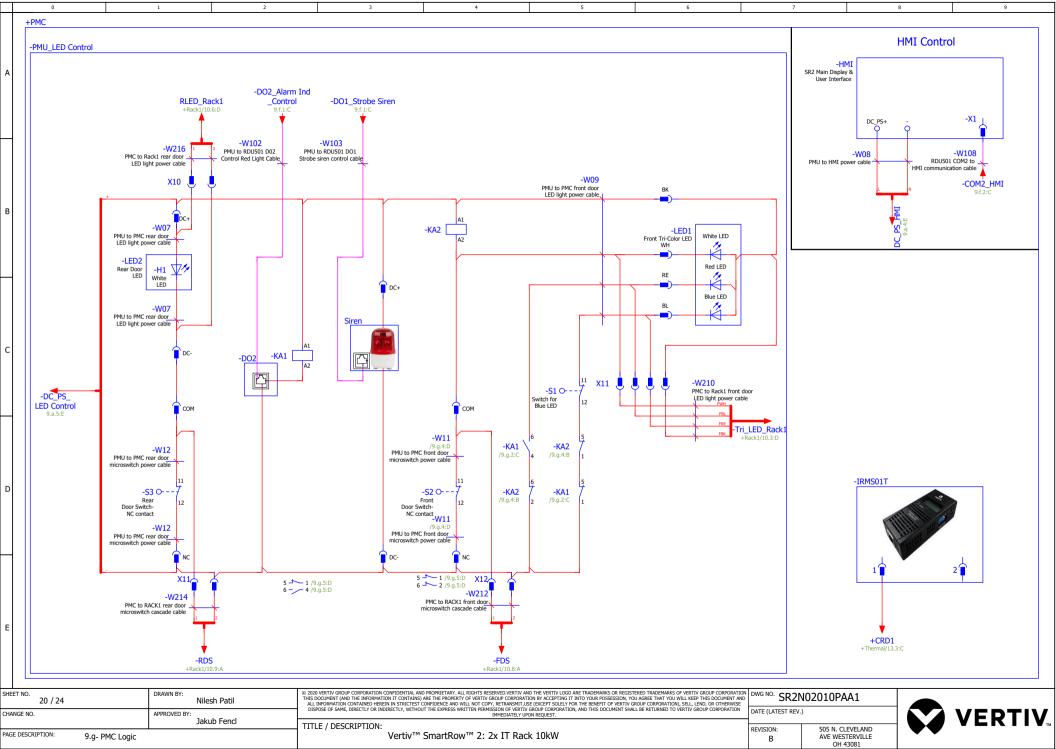


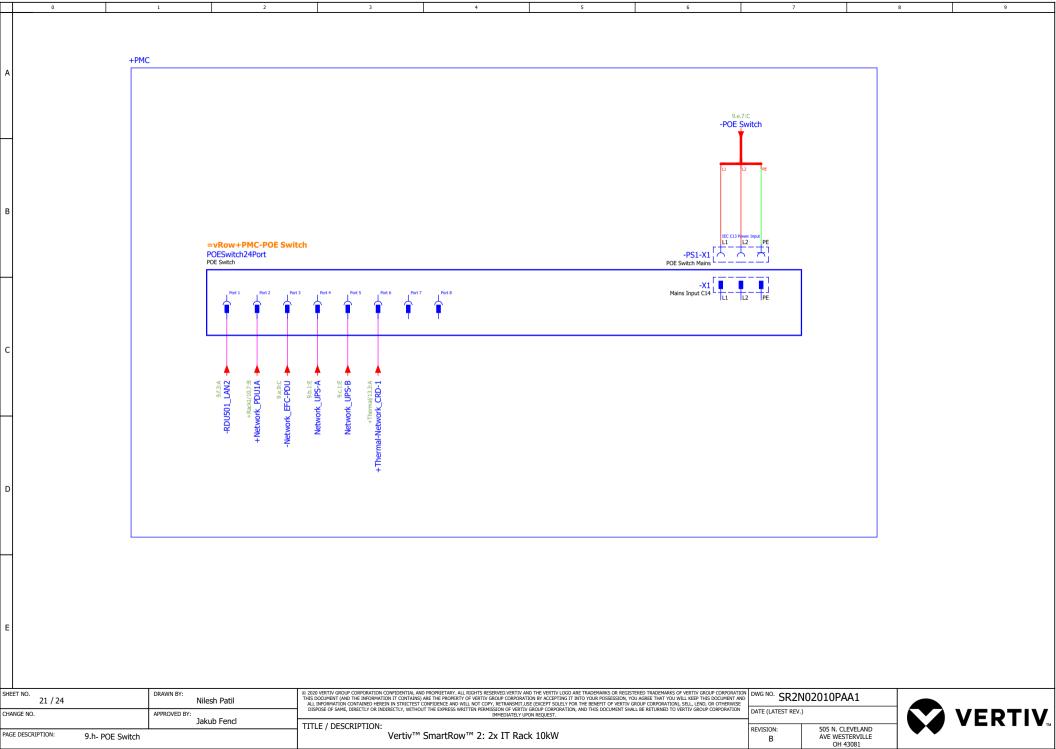


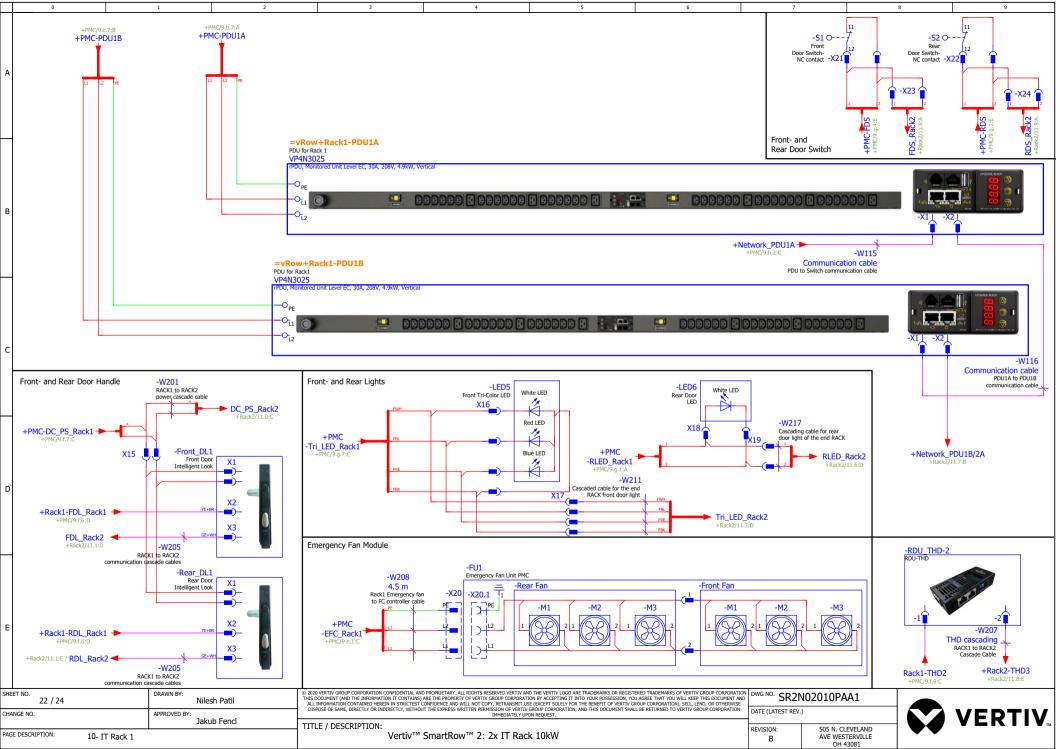


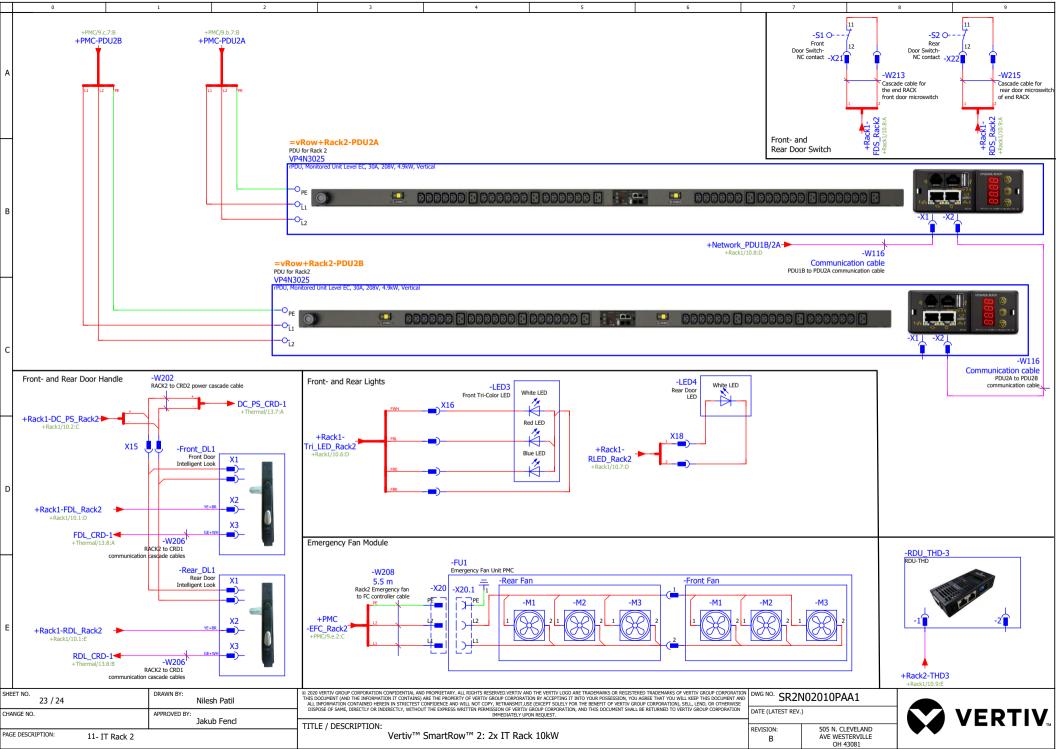


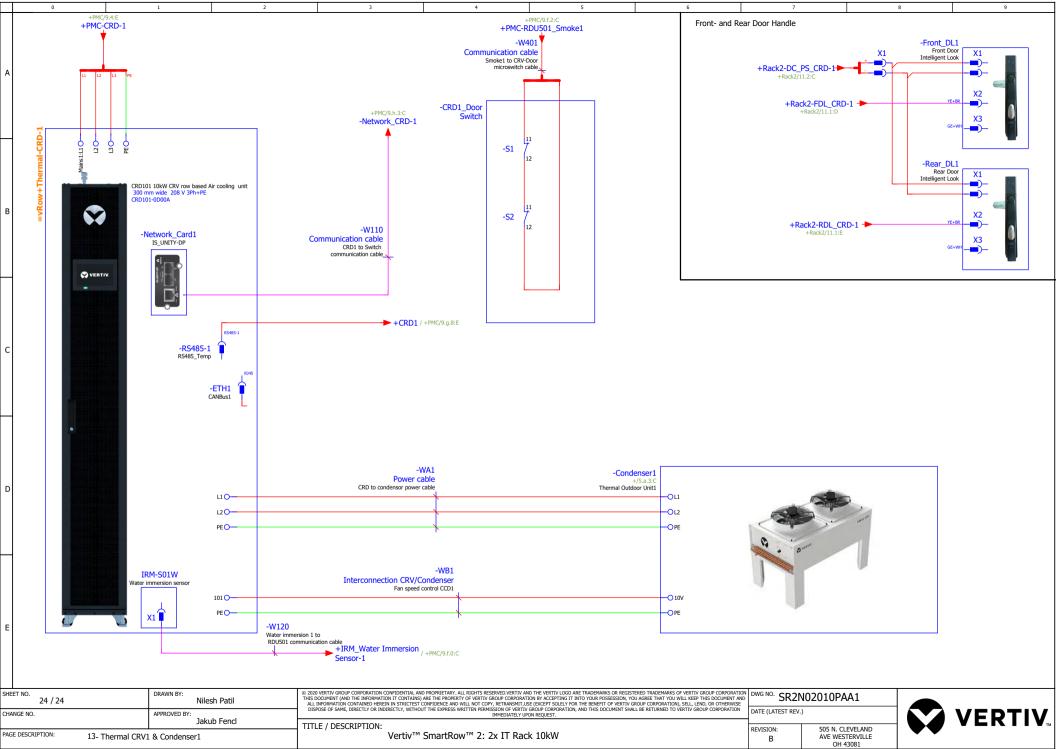


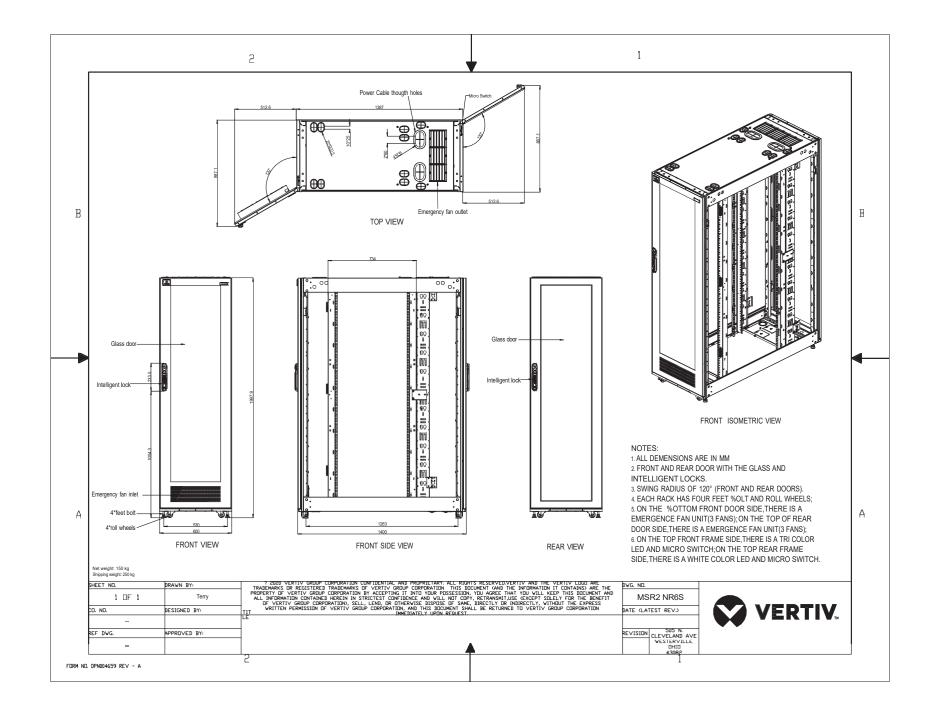


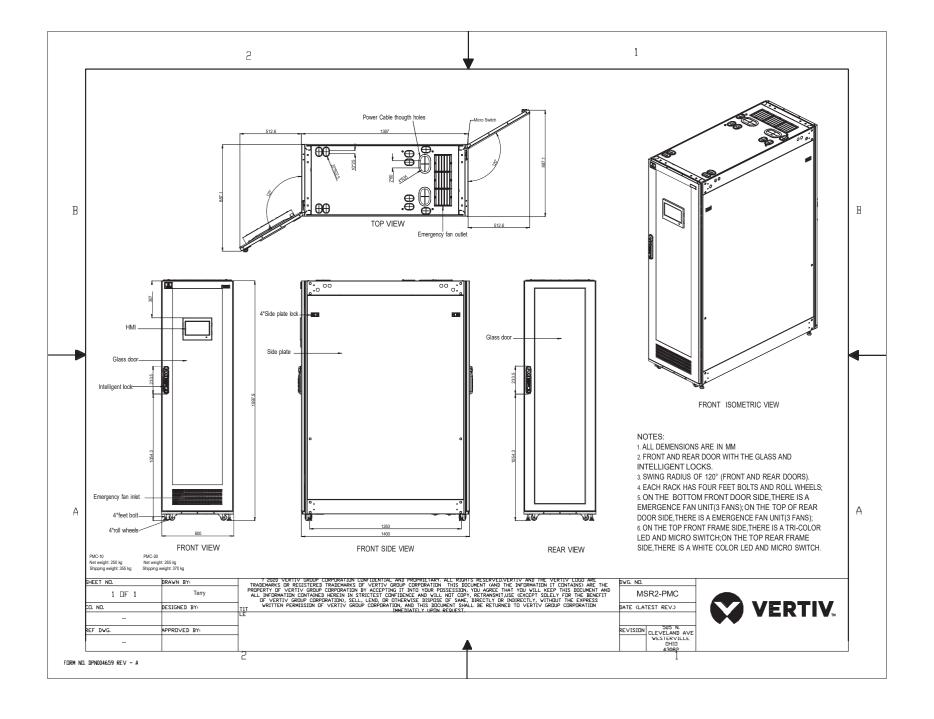


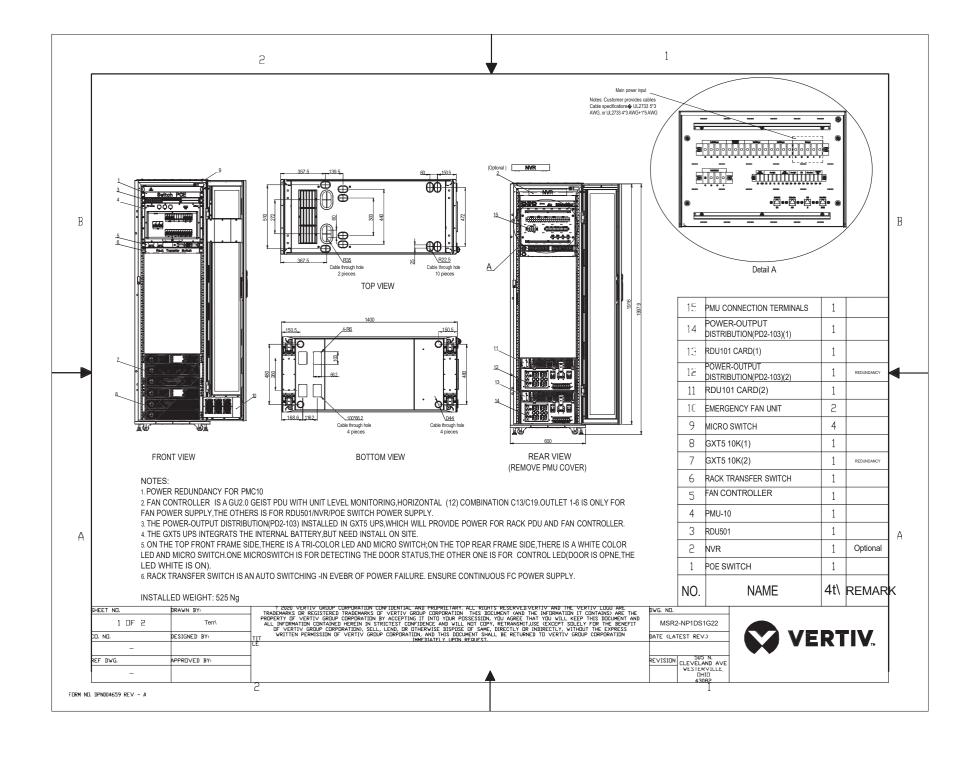


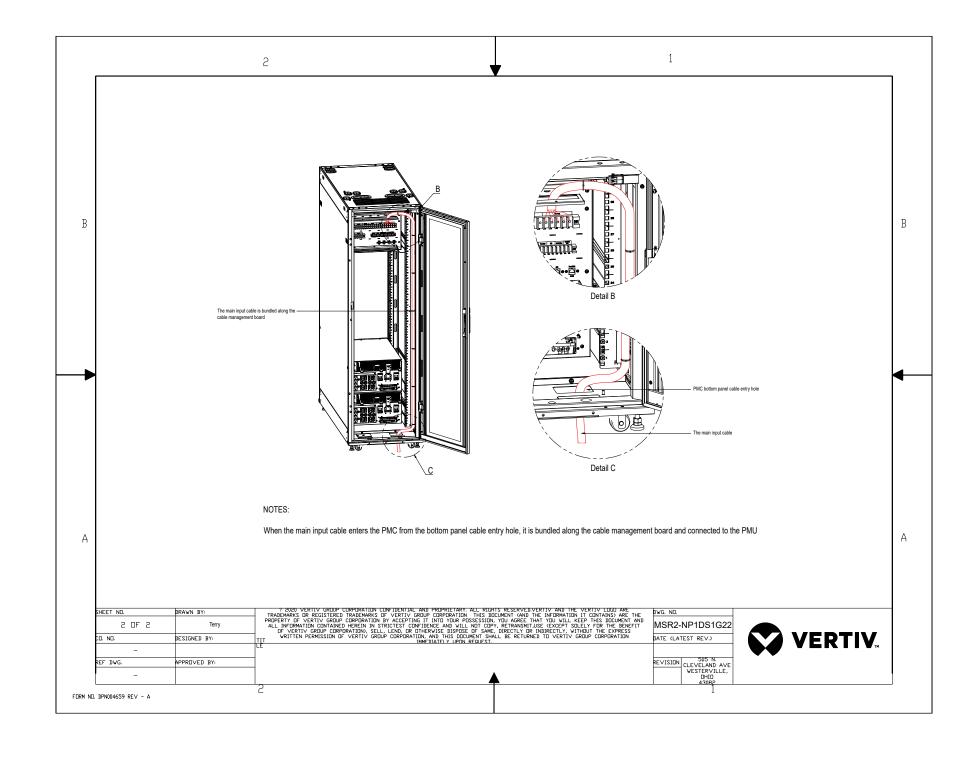


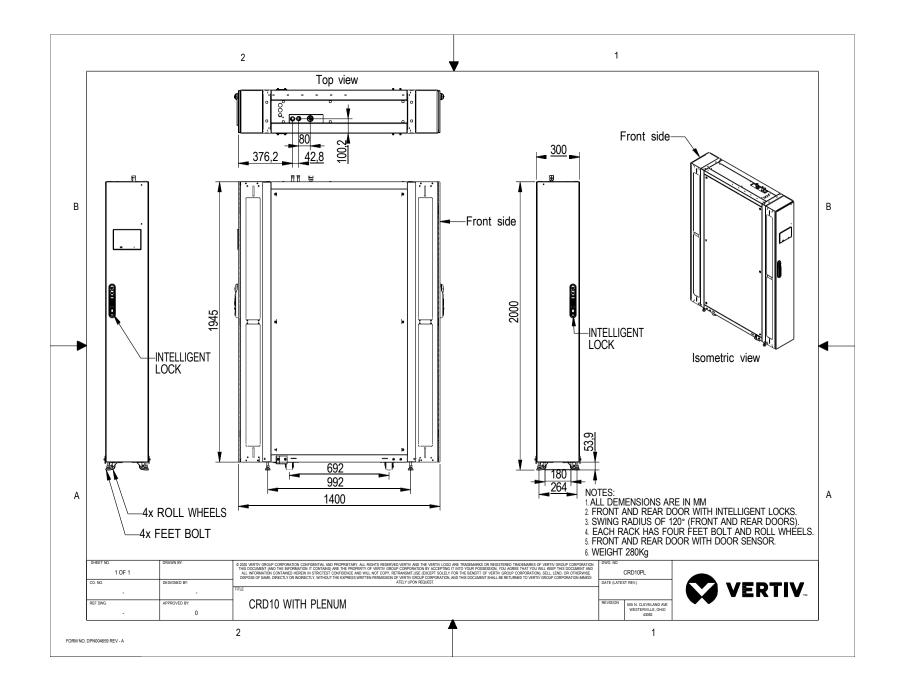

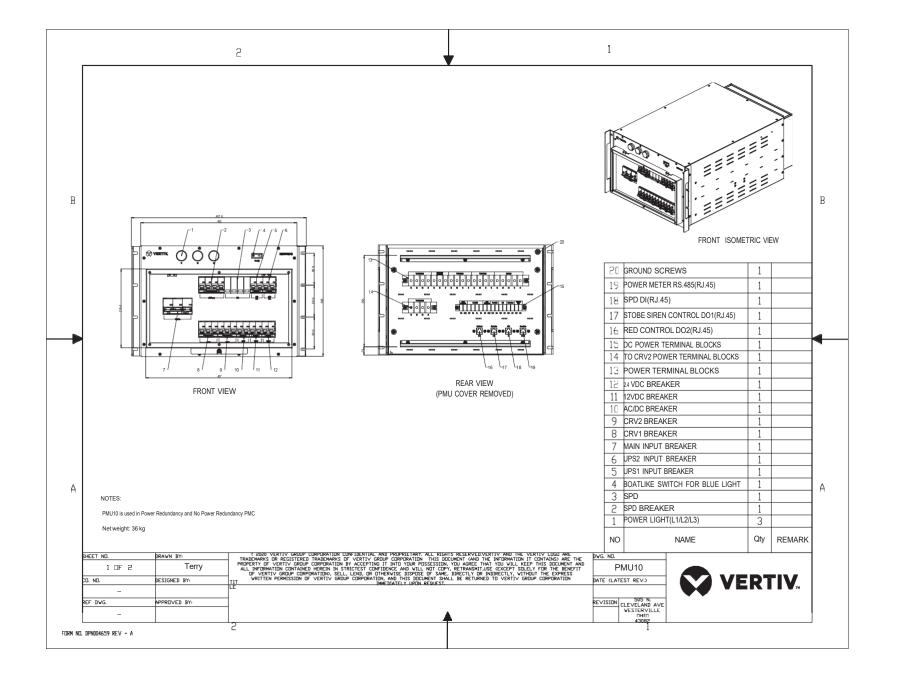

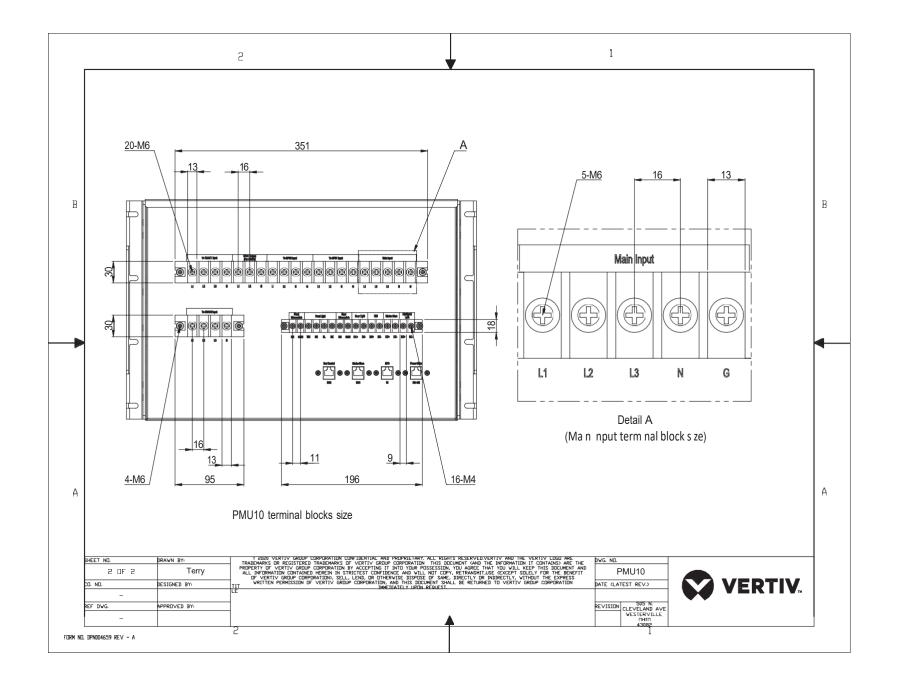

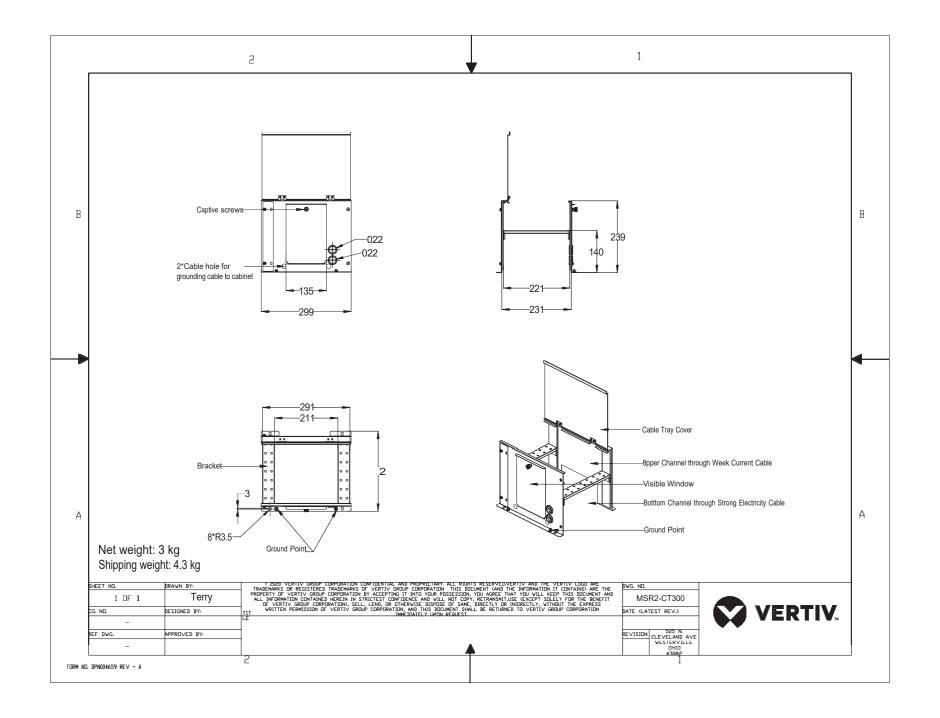

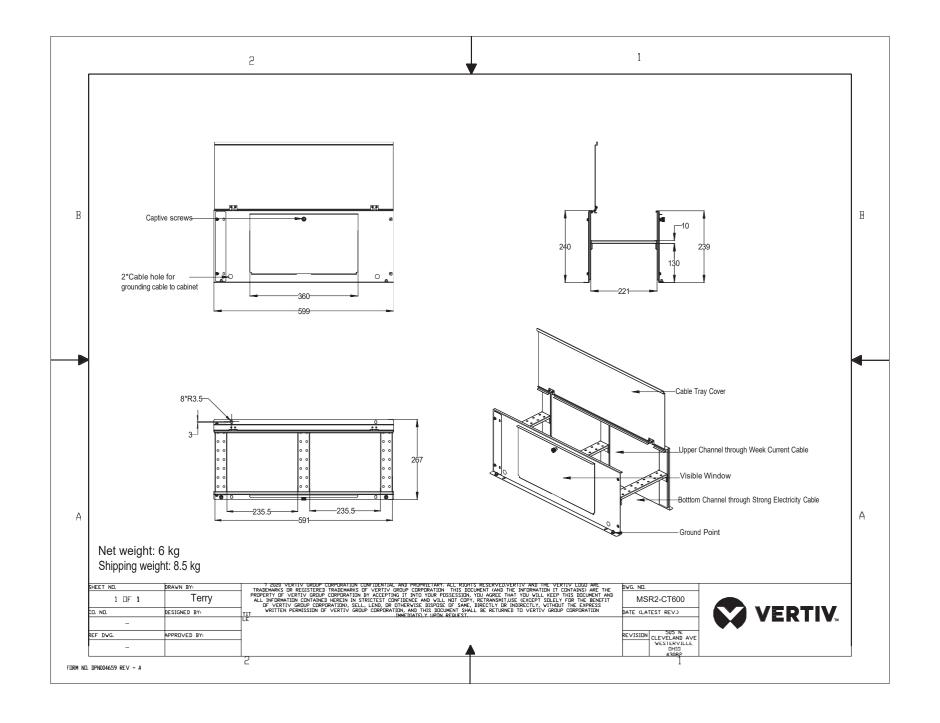



SCOPE OF WORK

SmartRow2 Assembly

SERVICE SUMMARY

Feature	Detail
On-Site Service	Site trip(s) within the 48 contiguous states. Visit(s) to be scheduled by the customer between 7 am-5 pm, Monday-Friday (excluding weekends & national holidays).
Customer Support	Includes access to the Customer Resolution Center (1-800-543-2378) and the Vertiv Customer Services Network Online Internet portal for extent of product warranty.
Consolidation	The SmartRow2 includes numerous shippable units (typically pallets or boxes) that originate from multiple factories and suppliers. Vertiv consolidates these items into a single customer shipment and reduces the likelihood of shippable units being lost at the customer site. This benefits the customer by relieving the burden of keeping track of multiple partial shipments.
Inside Delivery	Vertiv Service will move the shippable units from the delivery truck to the Staging Area. Vertiv Services will unpackage the shippable units and remove/dispose of the packaging material so that it is ready for assembly. Vertiv will verify that all material on the sales order has been received.
Project Management	Included with Consolidation and Inside Delivery. Vertiv will assign a project manager for the project. The Project Manager will supervise the Consolidation and Inside Delivery Process and communicate hardware shipment schedules with the customer.
Assembly	SmartRow2 is assembled onsite by Vertiv factory-trained and authorized technicians equipped with Vertiv Proprietary tools and software. Vertiv CEs and Vertiv Partners are the only approved OEM service providers for Vertiv products. These technicians are supervised by a Site Manager who also gathers site-specific requirements like safety and work procedures
Factory Startup	Warranty inspection and startup validates the warranty and initializes the warranty coverage period

SERVICE PERFORMED

Consolidated Shipment

Shippable units may be available at time of order or built-to-order with a lead time. Vertiv safely stores these items in-warehouse until the customer is ready to receive the SmartRow2 in a single shipment

Inside Delivery

Vertiv Services will deliver the shippable units from the delivery truck to the Staging Area. Vertiv Services will unpackage the shippable units and remove/dispose of the packaging material so that it is ready for assembly. Vertiv will verify that all material has been received.

Change order option:

There must be an appropriate loading dock with continuous, level floor from the dock to the staging area. If the shippable
units must be moved up/down stairs, the customer must provide a suitable elevator, or charges for special rigging will be
incurred. If the customer does not have an appropriate loading dock, nominal charges may/may-not apply for a lift-truck
delivery.



Scope of Work | Vertiv Commissioning

Rev: 08/30/2022

Page 3 of 3



Project Management

Vertiv will assign a project manager and a site manager for the project.

The Project Manager will supervise the Consolidation and Inside Delivery Process and communicate schedules with the customer.

The Site Manager will supervise the assembly, startup, warranty inspection and turn over the SmartRow2 to the customer

Site-Specific Requirements

All personnel will be available for up to two hours per week for Site Access, Safety Training and other site-specific requirements Change Order Option:

Vertiv can quote a price for additional man-hours if 2 hours per week is insufficient

Assembly

There shall be continuous, level floor between the Staging Area and the Installation Location so that heavy items can be moved via casters/pallet jacks.

Change Order Option:

• If there is not continuous level floor, the customer must provide or pay for any necessary lift/rigging equipment.

Vertiv PMC, including RDU501 SmartRow2 Controller/Display

Vertiv will position, level, and bay together the PMC as described in the submittal documents.

The customer is responsible for providing primary electrical power to the PMC.

Vertiv will program and configure the SmartRow2 RDU501 controller/display. This includes setting IP addresses so that the customer can monitor the system status remotely

Change Order Option:

 Vertiv will quote IP addressing of equipment on the customer network, but this would be done by other personnel and scheduled separately. This is outside the scope of SmartRow2 assembly.

Vertiv IT Rack(s)

Vertiv will position, level, and bay together the Vertiv IT Racks as described in the submittal documents.

Vertiv will not populate racks with customer IT gear, including blanking panels, servers, shelves, etc.

The customer must define addressing conventions (1,2,3,4, right-to-left or left-to-right) prior to start of work.

Cable Trays

Vertiv will install the SmartRow2 cable trays that are included with the SmartRow2 solution as described in the submittal documents

Liebert® CRV's, Temperature Sensors, Modbus cables, and associated Plenums

Vertiv will position and level the Liebert® CRV and attach the associated plenums to provide cooling to the SmartRow2.

Vertiv will connect the necessary temperature sensors.

The customer is responsible for piping and primary power to the CRV along with connecting CANBus cable between the CRV and heat rejection. All specific requirements (such as piping traps and proper electrical grounding) for correct product installation are detailed in the product installation manual.

After the SmartRow2 is assembled and the Liebert® CRV is piped and powered by the customer in accordance with the product installation manual, Vertiv will perform a factory warranty inspection along with the rest of the SmartRow2

Liebert® MC / CCD Condensers for Liebert® CRV's

VERTIV.

Scope of Work | Vertiv Commissioning

Avocent® Chloride® Liebert® NetSure™ Trellis™

Rev: 08/30/2022

Page 3 of 3

© 2022 Vertiv Group Corp. All rights reserved. Vertiv™ and the Vertiv logo are trademarks or registered trademarks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness here, Vertiv Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications, rebates and other promotional offers are subject to change at Vertiv's sole discretion upon notice.



Project Management

The customer is responsible for installing the associated heat rejection. This includes primary power, CANBus communication wire, piping, refrigerant charging, and all other tasks in the Installation Manual. Any/all penetration points in the walls/ceilings/floors for any wiring or piping are also the customer's responsibility.

Rack PDUs

Vertiv will install and connect all rack PDUs (if applicable) including GXT5 power extensions (if applicable) as described in the submittal documents

Liebert® GXT5 Single Phase UPS's

Vertiv will install and connect all Liebert® GXT5 UPS's and connect power within the PMC cabinet and output to the PDUs as described in the submittal documents.

Additionally, Vertiv will install ancillary equipment such as Maintenance bypass and PD2-103 cabling and connectors if not already preinstalled.

After the SmartRow2 is assembled and Primary Power to the SmartRow2 is provided by the customer, Vertiv will perform factory startup of all GXT5 equipment along with the rest of the SmartRow2

Switch

Vertiv will install and connect the switch within the PMC cabinet. as described in the submittal documents

Firmware Updates

Vertiv will update firmware of any/all units to the current revision level. Shippable units are sourced globally and firmware evolves as products may be in stock with prior revisions

Wiring

Vertiv will run all necessary wiring for power and communication between cabinets as part of assembly. This includes setting IP/DIP switch settings for proper communication between the device and the PMC

Accessories

The SmartRow2 is available with lights, door locks/sensors, temperature sensors that Vertiv will connect and install.

Services associated with cameras are sold separately and out-of-scope for the SmartRow2 Assembly

RDU Monitor SmartRow2 mobile application

Services associated with the RDU Monitor SmartRow2 mobile applications are quoted separately and out-of-scope for SmartRow2 assembly

ASSUMPTIONS AND CLARIFICATIONS

- Vertiv start-up validates product warranty.
- Defects or damage resulting from installation not performed by Vertiv are not covered.
- Parts and Labor coverage is in accordance with Product Warranty. If a modified warranty is purchased, terms default to that specific package.
- Any customer site visit is limited to eight (8) hours per visit. Any time beyond forty (40) hours/wk or eight (8) hrs/day or additional Startup visits will be billed separately.



Scope of Work | Vertiv Commissioning

Avocent® Chloride® Liebert® NetSure™ Trellis™

Rev: 08/30/2022

Page 3 of 3

© 2022 Vertiv Group Corp. All rights reserved. Vertiv[™] and the Vertiv logo are trademarks or registered trademarks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness here, Vertiv Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications, rebates and other promotional offers are subject to change at Vertiv's sole discretion upon notice.



- Expenses incurred due to delays that are beyond the control of Vertiv may be billed at cost.
- Startup visit must be scheduled confirmation of proper installation (if Vertiv not involved with installation).
- This pricing excludes any load bank testing. This can also be quoted separately if required.
- Pricing excludes activities associated with 3rd party commissioning
- Pricing excludes any type of circuit breaker NEMA testing. This can also be quoted separately if required.
- Customer/Installing contractor is responsible for providing elevated access as necessary.
- Any additional requests beyond the scope of this document will be billed separately by Vertiv.
- Vertiv will not perform physical changes to the site building (such as drilling holes, etc.)

CUSTOMER RESPONSIBILITIES

In order to provide timely, accurate and thorough execution of the services described herein, Vertiv requests the following:

- Point of Contact: Provide an authorized point of contact(s), specific for the scope of work, for scheduling and coordination purposes.
- Scheduling: Make dates available for scheduling service. All visits must be requested 4 weeks in advance for assembly and 10
 days for startup/warranty-inspection of need by contacting the Vertiv Project Manager. Site must be available for 5 consecutive
 business days. Customer may choose to pay for premium time if weekend work is necessary.
- Site Access: Prior to time of scheduled work, provide site access including any customer required escort, security clearance, safety training and badging for Vertiv personnel.
- Equipment Access: Convenient access to the equipment covered by the Scope of Work. Prior to scheduled time of work, notify Vertiv personnel of any special requirements for equipment access including lifts, ladders, etc.
- Shutdown: Service may require shutdown of load to ensure electrical connection integrity.
- Notification: If for any reason the work cannot be performed during scheduled time, notify Vertiv personnel 24-hours prior to scheduled event.
- Provide Method of Procedure (MOP) requirements/ templates, and required review period(s)

TERMS AND CONDITIONS

Subject to all Terms & Conditions as noted in the Vertiv Terms & Conditions or the terms of a Master Agreement between the parties, if any, shall apply.

