



2


1

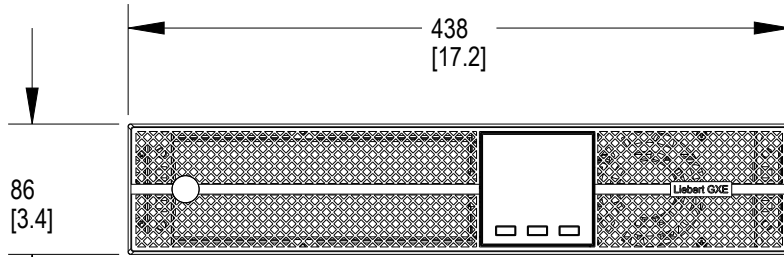

FRONT VIEW

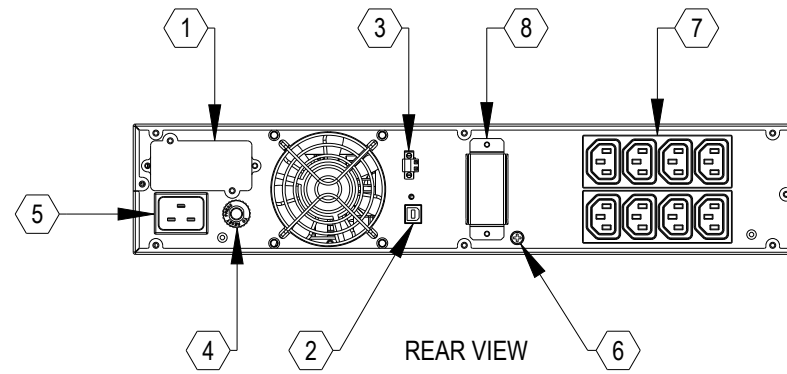

REAR VIEW

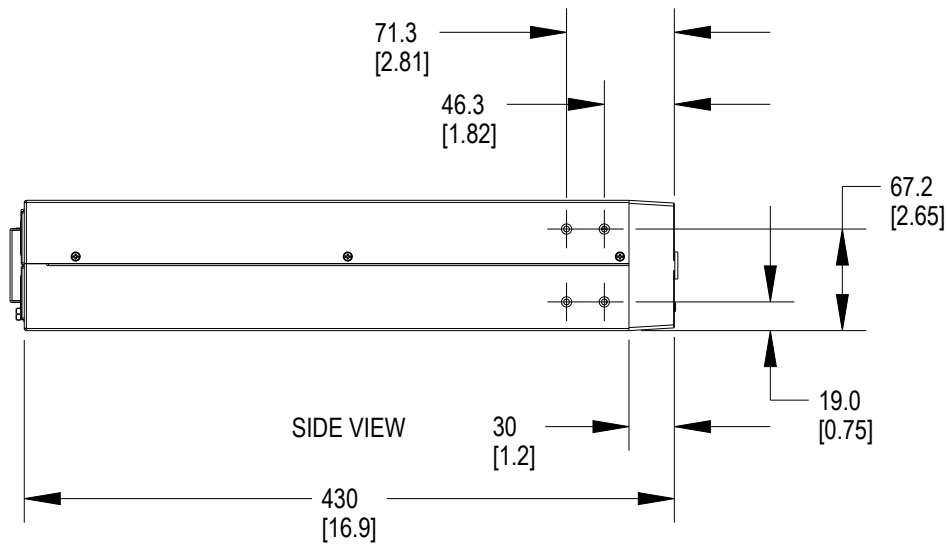

SIDE VIEW

- ① INTELLISLOT PORT
- ② USB PORT
- ③ EPO PORT
- ④ 20A INPUT CIRCUIT BREAKER
- ⑤ 16A INPUT POWER PLUG (C20)
- ⑥ EXTERNAL GROUND SCREW
- ⑦ IEC OUTPUT RECEPTACLES (C13)
- ⑧ EXTERNAL BATTERY CONNECTOR

NOTES :

1. UNIT DIMENSIONS (W x D x H) : 438mm x 430mm x 86mm
(17.2") x (16.9") x (3.4")
2. UNIT WEIGHT : 22.7 Kg (50.0 Lbs)
3. SHIPPING DIMENSIONS (W x D x H) : 600mm x 560mm x 235mm
(23.6") x (22.0") x (9.3")
5. SHIPPING WEIGHT : 24.8 Kg (54.7 Lbs)
6. MINIMUM AIRFLOW CLEARANCE : 100mm (4.0") FRONT & REAR.

SHEET NO. 1 OF 1	DRAWN BY: ANIKET PATIL	TITLE OUTLINE DRAWING LIEBERT GXE3-2000IRT2UXL UPS
CO. NO. -	DESIGNED BY: PETE BENNER	
REF DWG. -	APPROVED BY: BAPIN NARAYANKAR	

DWG. NO. GXE3-2000IRT2UXL_OL	505 N. CLEVELAND AVE WESTERVILLE, OHIO 43082
DATE (LATEST REV.) 11-DEC-23	
REVISION 0	



2

1