



2

1

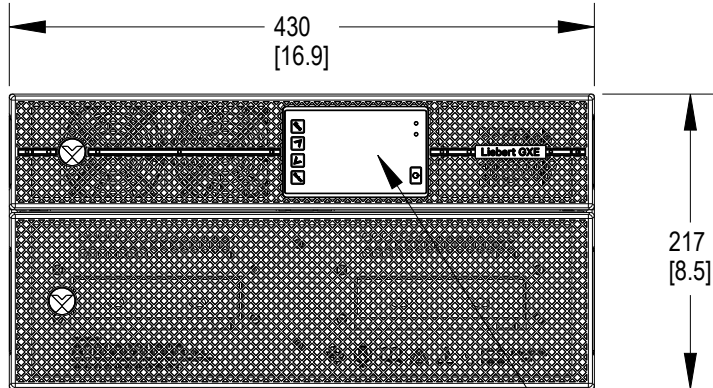

FRONT VIEW


FOR DETAIL SEE  
DRAWING GXE3-DISPLAY

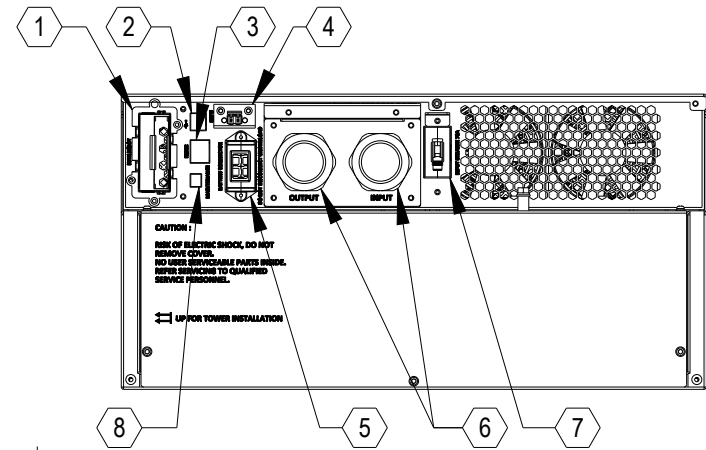

REAR VIEW

B

B

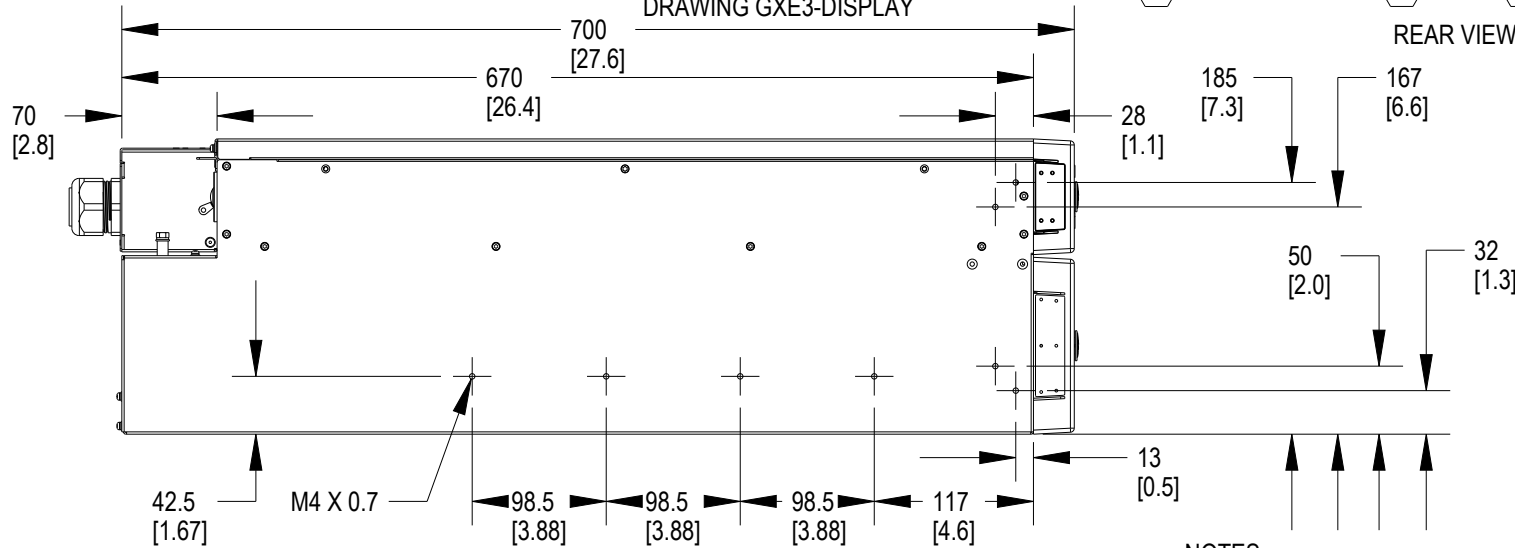

SIDE VIEW

A

A

- 1 INTELLISLOT PORT
- 2 USB PORT
- 3 RS232 PORT
- 4 REPO
- 5 EXTERNAL BATTERY CONNECTOR
- 6 HARDWIRED INPUT/OUTPUT POWER CONNECTIONS
- 7 70A INPUT CIRCUIT BREAKER
- 8 MAINTENANCE PORT

NOTES

1. UNIT DIMENSIONS (WxDxH) 430mm x 700mm x 217mm(5U)  
(16.9") x (27.6") x (8.5")
2. UNIT WEIGHT : 80.0kg (176.4lbs)
3. SHIPPING DIMENSIONS (WxDxH) 600mm x 800mm x 530mm  
(23.6") x (31.5") x (20.9")
4. SHIPPING WEIGHT: 102kg (224.9lbs)
5. MINIMUM AIRFLOW CLEARANCE IS 100mm (4.0")  
FRONT AND REAR.

SHEET NO. 1 OF 1	DRAWN BY: AVINASH PATIL
CO. NO. -	DESIGNED BY: P BENNER
REF DWG. -	APPROVED BY: P BENNER

<p>TITLE</p> <p><b>OUTLINE DRAWING</b></p> <p><b>GXE3-10KIRT5UXL</b></p>	DWG. NO. GXE3-10KIRT5UXL
	DATE (LATEST REV.) 01-NOV-22
	REVISION 0

1050 DEARBORN DR P.O. BOX 29186 COLUMBUS, OH 43229
--



2

1