
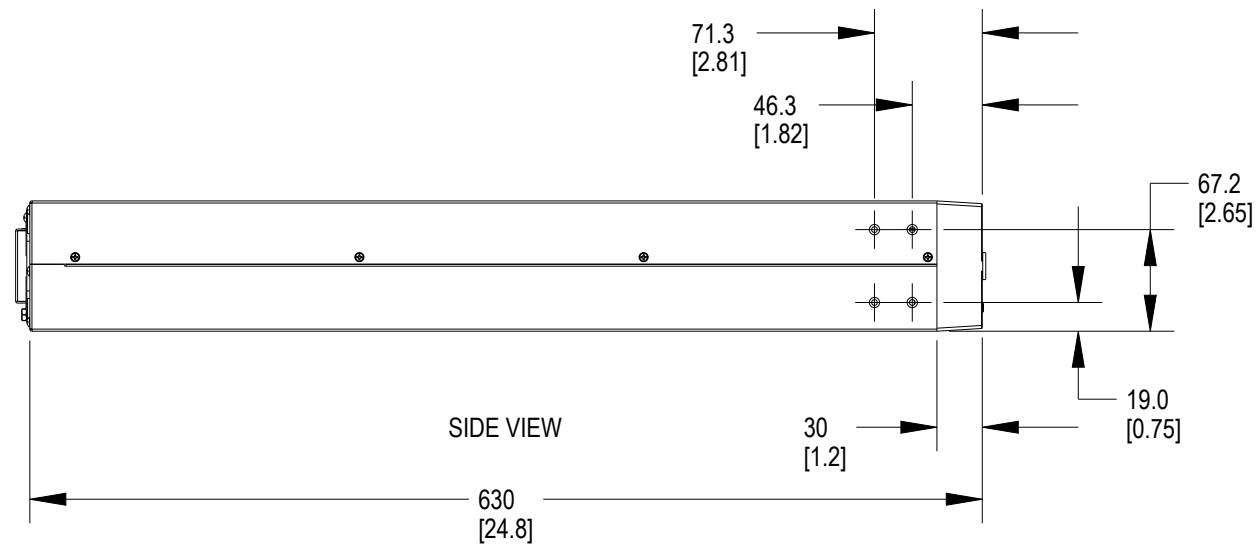
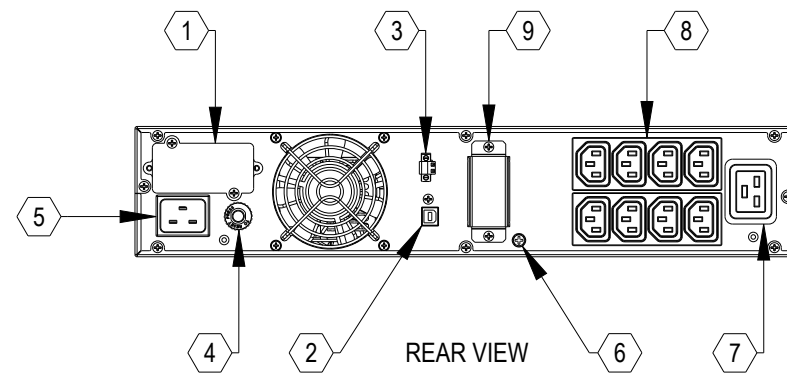


2

1

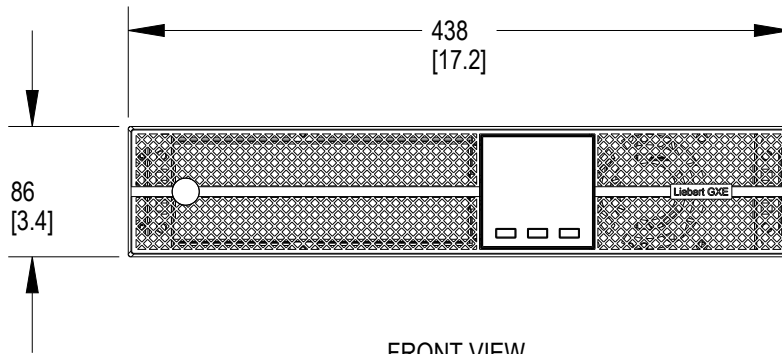

- ① INTELLISLOT PORT
- ② USB PORT
- ③ EPO PORT
- ④ 20A INPUT CIRCUIT BREAKER
- ⑤ 16A INPUT POWER PLUG (C20)
- ⑥ EXTERNAL GROUND SCREW
- ⑦ OUTPUT POWER RECEPTACLE (C19)
- ⑧ IEC OUTPUT RECEPTACLES (C13)
- ⑨ EXTERNAL BATTERY CONNECTOR

NOTES :

1. UNIT DIMENSIONS (W x D x H) : 438mm x 630mm x 86mm
(17.2") x (24.8") x (3.4")
2. UNIT WEIGHT : 31.5 Kg (69.4 Lbs)
3. SHIPPING DIMENSIONS (W x D x H) : 600mm x 790mm x 235mm
(23.6") x (31.1") x (9.3")
5. SHIPPING WEIGHT : 34.2 Kg (75.4 Lbs)
6. MINIMUM AIRFLOW CLEARANCE : 100mm (4.0") FRONT & REAR.

SHEET NO. 1 OF 1	DRAWN BY: ANIKET PATIL	TITLE OUTLINE DRAWING LIEBERT GXE3-3000IRT2UXL UPS
CO. NO. -	DESIGNED BY: PETE BENNER	
REF DWG. -	APPROVED BY: BAPIN NARAYANKAR	

DWG. NO. GXE3-3000IRT2UXL_OL	505 N. CLEVELAND AVE WESTERVILLE, OHIO 43082
DATE (LATEST REV.) 07-DEC-23	
REVISION 0	

