




April 2020  
Vertiv EDGE 130V

Rev. 02

Vertiv EDGE 1U Rack models

Load %	100VA			150VA		
	Load (W)	900	1000W	Load (W)	900	1000W
100%	5.9	450	5.2	900	5.4	1350
80%	6.2	480	5.5	810	5.6	1215
60%	7.5	360	7.5	720	7.9	1080
50%	9.3	315	9.3	630	9.6	945
40%	11.7	270	11.7	540	11.9	810
30%	15.0	225	15.0	450	15.1	675
20%	20.1	180	20.1	360	20.9	540
10%	28.5	135	28.5	270	29.8	405
5%	42.7	90	42.7	180	42.4	270
1%	88.7	45	88.7	90	89.1	135
75%	8.4	338	8.4	675	8.6	1013
50%	11.3	251	11.3	502	11.4	753


See notes about runtime below. Runtimes in minutes.  
Not possible adding external battery cabinets.

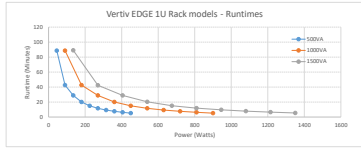

Vertiv EDGE Tower models

Load %	100VA		150VA	
	Load (W)	900	Load (W)	1000W
100%	5.9	675	5.4	900
80%	7.1	608	6.5	810
60%	8.6	540	7.9	720
50%	10.5	473	9.6	630
40%	13.9	405	12.1	540
30%	17.0	338	15.5	450
20%	22.8	270	20.7	360
10%	31.8	203	29.4	270
5%	47.1	135	43.9	180
1%	92.7	68	89.9	90
75%	9.5	506	8.7	675
50%	13.0	395	11.1	502


See notes about runtime below. Runtimes in minutes.  
Not possible adding external battery cabinets.

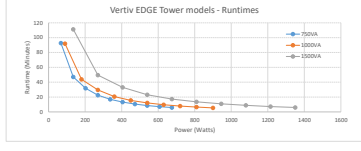

Vertiv EDGE Rack / Tower models


VA	Watts	1500VA 2U Rack/Tower						
		100% Load (W)	+1 EBC	+2 EBCs	+3 EBCs	+4 EBCs	+5 EBCs	+6 EBCs
1500	1350	6.4	26	56	86	116	147	178
1350	1115	7.2	32	64	97	131	166	200
1200	1080	8.8	38	74	113	151	190	230
1050	945	10.9	45	88	132	177	222	266
900	810	13.6	55	106	158	210	263	316
750	675	17.3	68	129	193	256	319	383
600	540	23.2	90	168	247	326	405	484
450	405	33.1	120	229	333	438	542	647
300	270	60.6	170	322	466	610	754	898
150	135	111.2	262	637	913	1189	1464	1740
117.5	101.3	75%	9.7	41	80	121	162	203
75%	33.8	37.4	145	254	369	484	599	713

See notes about runtime below. Runtimes in minutes.

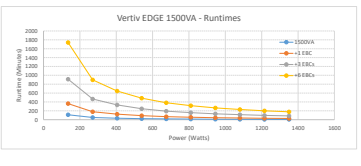


VA	Watts	220VA 2U Rack/Tower						
		100% Load (W)	+1 EBC	+2 EBCs	+3 EBCs	+4 EBCs	+5 EBCs	+6 EBCs
2200	1980	6.4	26	55	85	116	147	178
1980	1782	7.2	32	63	97	131	166	201
1760	1584	8.7	38	73	112	151	190	230
1540	1386	10.9	45	86	132	177	222	266
1320	1188	13.6	55	104	157	210	263	317
1100	990	17.3	68	129	193	256	319	383
880	792	23.2	90	168	247	326	405	484
660	594	33.1	120	229	333	438	542	647
440	396	60.6	170	322	466	610	754	898
220	198	111.2	262	637	913	1189	1464	1740
165.0	148.5	75%	7.4	39	79	120	162	204
75%	49.5	30.2	116	200	302	404	506	608

See notes about runtime below. Runtimes in minutes.

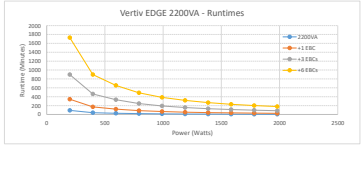

VA	Watts	3000VA 2U & 3U Rack/Tower						
		100% Load (W)	+1 EBC	+2 EBCs	+3 EBCs	+4 EBCs	+5 EBCs	+6 EBCs
3000	2700	6.4	20	40	61	84	106	129
2700	2430	7.2	23	46	70	96	121	146
2400	2160	8.6	27	54	82	110	139	168
2100	1890	10.9	33	64	97	129	163	196
1800	1620	13.6	41	78	117	156	195	234
1500	1350	17.3	52	97	144	191	239	286
1200	1080	23.2	69	127	186	245	304	364
900	810	33.1	97	175	254	334	413	493
600	540	60.6	137	243	350	458	566	674
300	270	111.2	264	637	913	1189	1464	1740
225.0	202.5	75%	9	30	59	89	119	150
75%	67.5	34	105	191	277	362	448	534

See notes about runtime below. Runtimes in minutes.

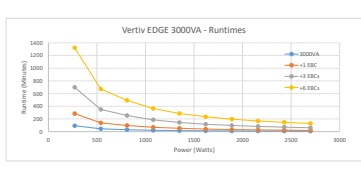

**IMPORTANT NOTE:**  
For Z9W - CE products.  
Approximate runtimes at 25°C for batteries in new (unused) conditions, fully recharged and pure resistive load. Actual runtimes can vary due to manufacturing variances of the batteries.  
Subject to approximately ±10% tolerance depending on load conditions. Runtimes in minutes unless otherwise specified.