



# Vertiv™ Liebert® PSI5 TAA Compliant UPS

High Performance Line  
Interactive UPS for Critical  
Network Power Protection



## Features

The Liebert PSI5 TAA Compliant allows you to get more from your UPS and your protected equipment, with features normally found only on more expensive systems:

- Battery backup provides ample time for an orderly shutdown of connected equipment
- The Liebert PSI5 TAA Compliant UPS can accept external battery cabinets for long runtime applications
- Liebert PSI5 UPS operates at a high 0.9 output power factor
- IS-UNITY-SNMP included with Liebert PSI5 TAA N SKU Bundle
- Controllable outlets enable users to power cycle connected equipment and drop non-critical loads so that runtime can be extended to critical loads
- Free Vertiv™ Power Insight management software
- Liebert PSI5 UPS is compliant with the Restriction of Hazardous Substances Directive (RoHS)

*The Liebert® PSI5 TAA Compliant is a compact, Automatic Voltage Regulation (AVR) line-interactive UPS system designed especially for IT applications such as network closets and small data centers.*

The Liebert® PSI5 TAA UPS supports advanced pure sine wave output on battery to safeguard critical IT equipment and business electronics. It is ideal for government environments that require a TAA compliant UPS to supply clean and reliable power protection for servers, critical nodes, network workstations, large network peripherals, network routers, bridges, and other electronic equipment.

### Ideally suited for:

- Servers
- Networking Equipment
- Safety and Security systems
- Network Workstations
- Large Network Peripherals
- Storage
- VoIP
- Media Closet Equipment
- POS Systems



## Reliable UPS Protection To Keep Your Network Up And Running

The flexible design of the TAA Compliant Liebert® PSI5 allows the UPS to be configured as a self-standing tower or to be rack-mounted within a 2U space. It is available in 1500VA, 2200VA and 3000VA at 120V.

The TAA compliant Liebert PSI5 UPS features an innovative advanced line-interactive design incorporating buck/boost Automatic Voltage Regulation (AVR) technology. This protects against utility voltage fluctuation by raising and lowering utility power to the level needed by the connected equipment. It also allows the UPS to prolong battery life by maximizing its time on utility power before going to battery.



### What's In The Box

- UPS Unit
- USB Type A to USB Type B cable 1.8 meter (6ft) in length
- Printed quick start guide with safety instructions
- Adjustable 4 post rack mounting kit
- Support base for tower configuration
- Vertiv™ Power Insight Management software (free download from [vertiv.com](http://vertiv.com))

## Liebert® PSI5 TAA Compliant UPS Standard Features

### Flexibility:

#### Rotatable Display Panel

LCD monitor panel rotates 90° to make the readout of the LCD display easy to see in rack or tower position.

#### Rack or Tower Configurations

Telescoping rails and tower base included for flexible deployment solutions.

### Extended Runtime Battery Connection

#### RJ-45 Data Line Surge Connectors

#### USB Port

#### Programmable Outlet Group



#### Input

#### Emergency Power Off (EPO) Connector

#### Output Receptacles

#### Input Circuit Breaker

#### Liebert® IntelliSlot Port

Unity SNMP card comes bundled with models ending in an "N"

Liebert® PSI5-1500 model

# Vertiv™ Liebert® PSI5 TAA Compliant UPS

## High Availability

**0.9 Output Power Factor:** More usable power enables more connected loads saving space and costs

**Wider Input Voltage Window:** Prolongs battery life by allowing the UPS to maximize the use of utility power before transferring to battery when input exceeds specified limits (76 to 146 VAC @120V)

**Full Sequenced Battery Testing:** The Liebert® PSI5 UPS includes an automatic and manual self-diagnostic test feature. This provides a comprehensive analysis of the condition of the batteries within the UPS and will notify you when the internal batteries need to be replaced.

**Advance Early Warning of UPS System Status:** The Liebert PSI5 UPS offers multiple audible and visual alarms to immediately alert you to an input voltage fluctuation (buck/boost), output overload, low battery or replace battery condition.

## Liebert® PSI5 TAA Compliant UPS accessories and options

### Replacement Internal Battery Kits

Liebert® Part Number	Description	Shipping Weight lbs.
PSI5-1500BATKITTAA	PSI5-1500TAA Replacement battery kit	25.5
PSI5-2200BATKITTAA	PSI5-2200TAA Replacement battery kit	37.8
PSI5-3000BATKITTAA	PSI5-3000TAA Replacement battery kit	38.8

### External Battery Cabinets

Liebert® Part Number	Description	Shipping Weight lbs.
PSI5-48VBATTTAA	External Battery Cabinet for Liebert® PSI5-1500RT120TAA	70.3
PSI5-72VBATTTAA	External Battery Cabinet for Liebert® PSI5-2200RT120TAA, PSI5-3000RT120TAA	96.1

Note: Runtimes with EBC are shown on page 7

### Telecom / Relay Rack Mounting Kits

Part Number	Description
2POSTRMKIT	Four pieces, two-post telecom rack kit

### Communication Card (bundled with models that end in "TAAN")

Part Number	Description
IS-UNITY-SNMP	10/100 Mbit Ethernet SNMP, Device Web Page, with MIB and configuration cable

## Flexibility

**Up to Seven Battery-Backed Outlets:** Allows the Liebert PSI5 more flexibility in accommodating additional equipment to be connected to the UPS via the receptacles.

**Configurable Input Voltage Window:** Allows the UPS to be properly matched to the incoming utility power and adjusts its input window and transfer points to supply regulated power to connected loads within the selected range.

**Programmable Outlet Group:** Power cycle connected equipment and load shed on battery to extend run time.

**Hot Swappable Batteries:** Increase product life and provide prolonged UPS reliability. Batteries are conveniently located behind the front bezel of the unit (RT models) or from the bottom (tower models).

## Manageability

**USB Communications:** Power management functions provide monitoring of UPS status and manage the automatic orderly shutdown of the computer if a power outage ever exceeds the battery capacity of the UPS. Vertiv™ Power Insight Shutdown Software is available at Vertiv.com.

**SNMP Communication Available with N Bundles:** Order the N bundle to add an IS-UNITY-SNMP communication card to the Liebert PSI5 TAA Compliant. The Liebert® Unity SNMP communication card provides network integration connectivity and allows you to monitor and control your UPS from your network management station or any PC.

- Sends both SNMP traps and emails for event notification
- Auto-senses 10M/100M Ethernet
- Compatible with shutdown software to ensure graceful computer shutdown
- Allows remote monitoring, start-up or restart for connected equipment
- Select models include factory integrated network management card

**Remote Emergency Power Off:** Allows the UPS to be remotely shut down during an emergency.

## Vertiv™ Liebert® PSI5 TAA Compliant UPS Specifications

Base Models	PSI5-1500RT120TAA	PSI5-2200RT120TAA	PSI5-3000RT120TAA
*Models with SNMP Card	PSI5-1500RT120TAAN	PSI5-2200RT120TAAN	PSI5-3000RT120TAAN
Power Rating, VA/W	1500VA/1350W	1920VA/1920W	2880VA/2700W
<b>Dimensions, W X D X H, IN (MM)</b>			
Unit	17.2 x 20 x 3.5 (438 x 510 x 88)	17.2 x 24.8 x 3.5 (438 x 630 x 88)	17.2 x 24.8 x 3.5 (438 x 630 x 88)
Shipping	10.2 x 26.5 x 21.7 (258 x 672 x 550)	10.2 x 26.7 x 21.7 (258 x 782 x 550)	10.2 x 26.7 x 21.7 (258 x 782 x 550)
<b>Weight, LB (KG)</b>			
Unit	42.6 (19.3)	59.1 (26.8)	70.8 (32.1)
Shipping	51.8 (23.5)	70.1 (31.8)	81.8 (37.1)
<b>Input/Output AC Parameters</b>			
Nominal Voltage Setting	100/110/115/120(default) / 125		
Voltage Range Without Battery Operation	75 to 146 VAC	75 to 146 VAC	75 to 146 VAC
Frequency Range	55~65Hz (57~63Hz Battery to Normal comeback)		
Surge Protection	1372J	1372J	1372J
Input Power Cord, 8ft (2.4m) Attached	NEMA 5-15	NEMA L5-20 std 5-20 adapter included	NEMA L5-30P
Output Receptacles – Not Controllable	(3) NEMA5-15R	(3) NEMA5-15/20R, (1) NEMAL5-20R	(3) NEMA5-15/20R, (1) NEMAL5-30R
Output Receptacles – Controllable	(3) NEMA5-15R	(3) NEMA5-20R	(3) NEMA5-20R
Transfer Time	4~6 ms Typical		
Battery Waveform	Pure Sinewave		
<b>Battery Parameters</b>			
Type	Valve-regulated lead-acid (VRLA) in compliance with UL 1989		
Recharge Time	4 hours to recover 90%		
<b>Internal Battery Run Time</b>			
Full Load	6 min	5 min	5.5 min
Half Load	18 min	14 min	16 min
<b>Environmental</b>			
Operating Temperature, °F (°C)	32° to 104° (0° to 40°)		
Storage Temperature °F (°C)	5° to 120° (-15° to 50°)		
Relative Humidity	20% – 90%, non-condensing		
Operating Altitude	0 to 9,942 (0 to 3,000) without derating. Operating temperature reduced 9 °F (5 °C) for each additional 1,640ft (500m) of altitude.		
Audible Noise	< 45 dB@line mode < 55 dB@battery mode	< 45 dB@line mode < 55 dB@battery mode	< 45 dB@line mode < 55 dB@battery mode
<b>Agency</b>			
Safety	UL 1778, c-UL-us Listed		
Emissions	FCC Part 15, Class B		
Network Surge	UL 497 B		
Transportation	ISTA Procedure 1A Certification		
TAA Compliant	Yes	Yes	Yes
Warranty	Standard 2 years	Standard 2 years	Standard 2 years
<b>Protection Plan</b>			
Equipment Protection Plan	\$400,000		

\* Available from select distributor.

## Liebert® PSI5 TAA Compliant UPS - Power Assurance Services

### Power Assurance Package

Bundled Start-up Service AND 5-Year On-site Emergency Response	Standard	With LIFE™ Services	With Removal	With LIFE and Removal
Equipment Model / Type	Part Number	Part Number	Part Number	Part Number
Liebert® PSI5 UP TO 3KVA	PAPPSI-1K3K	PAPPSI-1K3KLF	PAPPSI-1K3KRMV	PAPPSI-1K3KRLF
Liebert® PSI5 EXTERNAL BATTERY CABINETS	PAPPSI-BATT	----	PAPPSI-BATTRMV	

### Power Start-up Services

Startup service Only	Standard	With Removal
Equipment Model / Type	Part Number	Part Number
Liebert® PSI5 UP TO 3KVA	SUPSI-1K3K	SUPSI-1K3KRMV
Liebert® PSI5 EXTERNAL BATTERY CABINETS	SUPSI-EXTBTCB	SUPSIEXTBTCBRMV

### Power Emergency Services

5-Year On-site Emergency Coverage - Only	Standard	With LIFE™ Services
Equipment Model / Type	Part Number	Part Number
Liebert® PSI5 1500VA	PEPPSI-15005Y	PEPPSI-15005Y
Liebert® PSI5 2200VA	PEPPSI-22005Y	PEPPSI-22005Y
Liebert® PSI5 3000VA	PEPPSI-30005Y	PEPPSI-30005Y
Liebert® PSI5 48VBATT EXT BATT CABINET	PEPPSI-48VBATT	PEPPSI-48VBATT
Liebert® PSI5 72VBATT EXT BATT CABINET	PEPPSI-72VBATT	PEPPSI-72VBATT

### Power Assurance Package - Summary

- Includes all "Power Start-up Services" and "Power Emergency Services" support
- One Preventative Maintenance visit after 3rd year (5kVA UPS only)

### Power Startup Services - Summary

- Installation includes mounting and start-up of new UPS or EBC (excludes hard-wired applications)
- Services performed by Vertiv factory trained technician
- Services performed 7 X 24, excluding national holidays within the 48 contiguous states and Hawaii
- Removal and disposal of existing UPS or EBC equipment, if selected

### Power Emergency Services - Summary


- On Site Service Support
- Full-service five (5) year contract term commencing upon the start-up date
- 100% parts coverage, including internal batteries, POD and web card
- 100% labor and travel coverage 7 days/week, 24 hours/day
- 24-Hour Customer Resolution Center via 1-800-LIEBERT
- Access to Customer Services Network portal

### LIFE™ Services Includes Assurance Package, Startup Services, Power Emergency Services plus:

- Continuous Monitoring, Expert Analysis, and Proactive Response

Note: LIFE Services requires an UNITY card.

Please refer to the Scopes of Work for full and additional details.

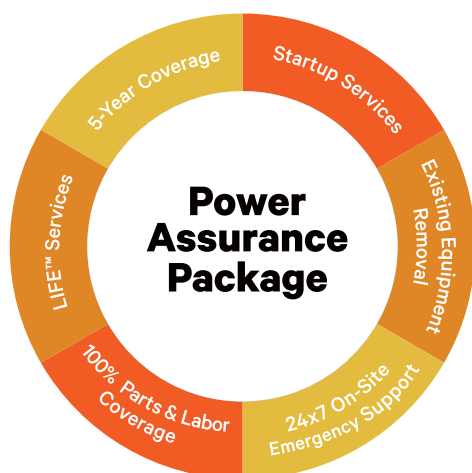

## Liebert® PSI5 TAA Compliant Extended Warranty

### Warranty Extension List Price

UPS Model Number	Warranty Extension List Price	
	Additional 1 Year	Additional 3 Years
UPS Model Number	Warranty Part Number	Warranty Part Number
PSI5-1500RT120TAA	1WEPSI5-1500	3WEPSI5-1500
PSI5-2200RT120TAA	1WEPSI5-2200	3WEPSI5-2200
PSI5-3000RT120TAA	1WEPSI5-3000	3WEPSI5-3000
External Battery Cabinets		
PSI5-48VBATTAA	1WEPSI5-48VBATT	3WEPSI5-48VBATT
PSI5-72VBATTAA	1WEPSI5-72VBATT	3WEPSI5-72VBATT

Note: Extended warranties can only be ordered when ordering the UPS and prior to shipment.

## Liebert® PSI5-1500RT120TAA

Load			Number Of External Battery Cabinets (EBCs)						
			Internal Battery Only	1	2	3	4	5	6
%	VA	W	Minutes						
100	1500	1350	6.0	24	50	78	107	138	169
75	1125	1013	9.5	33	66	102	141	181	222
50	750	675	18.0	59	119	183	249	316	383
25	375	337.5	37.0	122	240	363	486	611	736
10	150	135	110.5	330	619	911	1203	1496	1790

## Liebert® PSI5-2200RT120TAA

Load			Number of EBCs	
			Internal Battery Only	1
%	VA	W	Minutes	
100	1920	1920	5.0	27
75	1440	1440	7.5	40
50	960	960	14.0	66
25	480	480	31.5	137
10	192	192	88.0	358

Load			Number of EBCs				
			2	3	4	5	6
%	VA	W					
100	1536	1536	72	111	152	194	237
75	1152	1152	104	159	216	274	333
50	768	768	170	257	346	435	525
25	384	384	336	497	661	824	989
10	153.6	154	835	1213	1592	1971	2350

## Liebert® PSI5-3000RT120TAA

Load			Number of EBCs	
			Internal Battery Only	1
%	VA	W	Minutes	
100	3000	2700	5.5	20
75	2250	2025	8.5	27
50	1500	1350	16.0	50
25	750	675	34.0	102
10	300	270	103.0	282

Load			Number of EBCs				
			2	3	4	5	6
%	VA	W					
100	2400	2160	52	78	106	134	164
75	1800	1620	74	112	151	191	232
50	1200	1080	122	182	244	306	370
25	600	540	244	358	473	589	705
10	240	216	619	887	1156	1425	1695



**Vertiv.com** | Vertiv Headquarters, 505 N Cleveland Ave, Westerville, OH 43081, USA

© 2024 Vertiv Group Corp. All rights reserved. Vertiv™ and the Vertiv logo are trademarks or registered trademarks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness here, Vertiv Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications, rebates and other promotional offers are subject to change at Vertiv's sole discretion upon notice.